


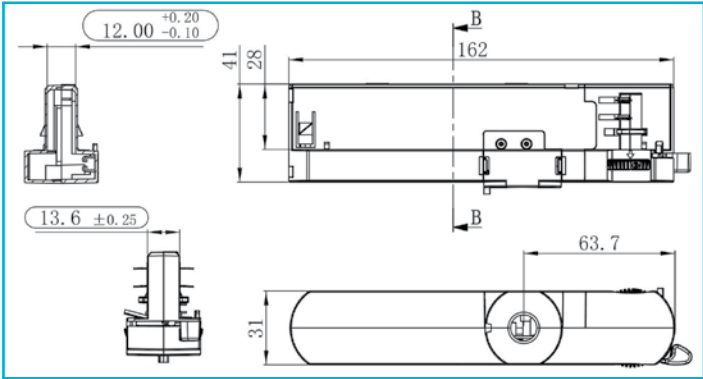

- Special features
- Suitable for surface-mounted and recessed systems
 - Integrated secondary drop protection
 - Supplied with trumpet nipple and M10 flat nut
 - Stable integrated adjustable power supply [CC]
 - Check suitability of the intended lamp
 - Max. 10 kg/100 N
 - Exclusively for D LINE, Ivela and Hoffmeister three-phase current tracks

Housing Material	Plastic
Housing Color	White
Functions	Short-circuit proof, Lamp control gear 110, Protective extra-low voltage, Overloading protection, Overvoltage protection, Overtemperature protection, Phase switch
Operating Mode	Constant current
Protection Class	Protection class I/protective grounding
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power	22.0-44 W
Output Voltage	27-42 V/DC
Output Current Selectable	850 mA, 900 mA, 950 mA, 1050 mA
Power Factor	0.97
Reference Point Tc	75 °C
Working Temperature	-20 to 35 °C
Storage Temperature	-20 to 75 °C
IP Protection Class	IP 20
Life Time	50000 h
Length	162 mm
Width	31 mm
Height	41 mm
Product weight	113 g

Multi-CC variable power/voltage ranges		
Current	Power	Voltage
850mA	22,95W - 35,70W	27V - 42V
900mA	24,30W - 37,80W	27V - 42V
950mA	25,65W - 39,90W	27V - 42V
1050mA	28,35W - 44,10W	27V - 42V
max. 2 lamps per channel - check voltage range!		

CC

SELV

IP20