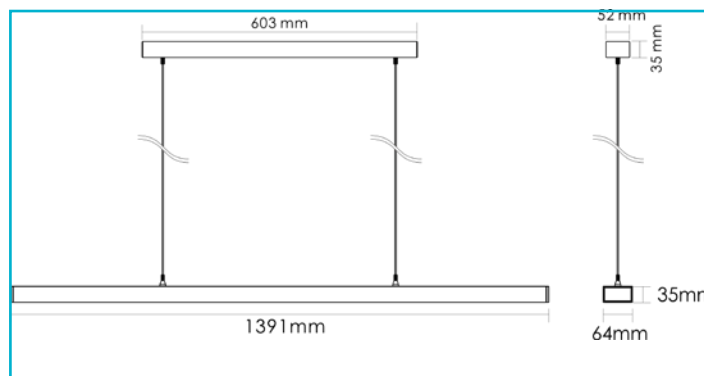


**Special features**


- Suitable for workstations with screens (in accordance with EN 12464-1 BAP65 [L65 = 3,000 cd/m²])
- Eligible for BEG German federal funding for energy-efficient buildings
- CRI > 95 for direct light proportion
- Indirect light proportion 85 %
- D4i power supply unit for direct pairing with DALI sensor

Housing Material	Aluminium
Housing Color	White
Surface structure	Matt
Material of Lens	Polycarbonate - PC
Suitable for Computer Workstations	Yes
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Functions	Corridor function DALI, Emergency power capable

Protection Class	Protection class I/ protective grounding
Rated Input	77 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Min./max. dimming range	0.01-100 %
Control	DALI 2 / DT6 D4i, Intelli Push-Dim
Motion Detector	No
Voltage range DC	176-280 V/DC
Voltage range emergency lighting	200-264 V/DC

Light Source	LED, Light source changeable TC
Color Temperature	4000 K
Colour Consistency	3 SDCM
Colour consistency light source	3 SDCM
CRI (Ra)	95
Rated Luminous Flux	10900 lm
Luminous Efficiency	141.5 lm/W
Rated Angle of Reflection	115 Degree
Rated Angle of Reflection 2	50 Degree

UGR	6
Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below
Length	1391 mm
Width	64 mm
Height	35 mm
Base length	603 mm
Base L x W x H	603 x 52 x 35 mm
Base width	52 mm
Base height	35 mm
Pendulum Length max.	2500 mm
Working Temperature	-20 to 45 °C
Storage Temperature	-40 to 80 °C
Surface Temperature max.	45 °C
IP Protection Class	IP 20
IK Protection Class	IK03
Inrush Current max.	34.4 A / 160 µs



Art.-Nr. 342261



Pendant lamp
Office Three Pro Up and Down, 77 W, DALI, 4000 K, white

Max. units per MCB B10	12 PCS
Max. units per MCB B16	19 PCS
Max. units per MCB C10	16 PCS
Max. units per MCB C16	25 PCS
Life Time L70 / B50	72000 h
Life Time L80 / B10	50000 h
Life Time L80 / B50	51000 h
Switching Cycles	100000 PCS
Power Consumption	77 kWh/1000h
Energy Efficiency Class Lightsources	This product contains a light source of energy efficiency class C.