

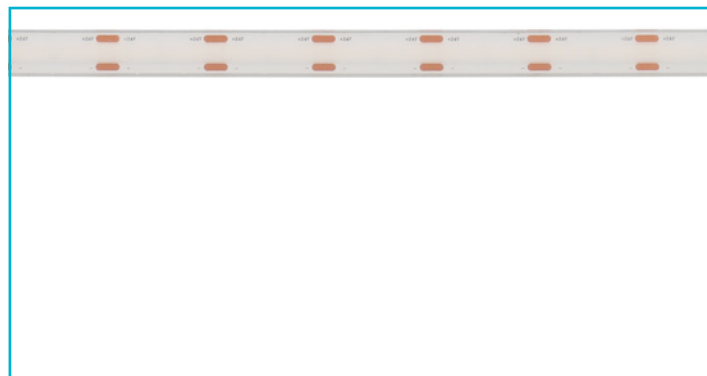


**Strip light****Professional, COB, 24 V-15 W, 4000 K, IP67, 5 m**

|                                        |                                               |                                         |               |
|----------------------------------------|-----------------------------------------------|-----------------------------------------|---------------|
| <b>Housing Color</b>                   | White                                         | <b>LED Distance</b>                     | 3.47 mm       |
| <b>Mounting Location</b>               | Inside, Outside                               | <b>Bending Radius min.</b>              | 70 mm         |
| <b>Protection Class</b>                | Protection class III/safety extra-low voltage | <b>Total Length to be Operated max.</b> | 5 m           |
| <b>Operating Mode</b>                  | Constant voltage                              | <b>Length</b>                           | 5000 mm       |
| <b>Rated Input 1m</b>                  | 15 W                                          | <b>Width</b>                            | 12 mm         |
| <b>Rated Power Consumption Standby</b> | 0.5 W                                         | <b>Height</b>                           | 4.5 mm        |
| <b>Rated Input Voltage</b>             | 24 V/DC                                       | <b>Width Hose</b>                       | 12 mm         |
| <b>Power Supply Unit incl.</b>         | No                                            | <b>Height Hose</b>                      | 2.2 mm        |
| <b>Connection Cable Primary</b>        | Yes                                           | <b>Length end cap</b>                   | 10 mm         |
| <b>Primary Connection</b>              | With free strand / conductor ends             | <b>Width end cap</b>                    | 14 mm         |
| <b>Primary Cable Length</b>            | 0.5 m                                         | <b>Height end cap</b>                   | 3.2 mm        |
| <b>Connection Cable Secondary</b>      | Yes                                           | <b>Product weight</b>                   | 370 g         |
| <b>Secondary Connection</b>            | Open cables                                   | <b>Working Temperature</b>              | -20 to 50 °C  |
| <b>Secondary Cable Length</b>          | 0.5 m                                         | <b>Storage Temperature</b>              | -30 to 80 °C  |
| <b>Dimmable</b>                        | Yes                                           | <b>IP Protection Class</b>              | IP 67         |
| <b>Control</b>                         | Dimmable via optional controller              | <b>Type of IP Protection</b>            | Silicone hose |
| <b>Number of Channels</b>              | 1                                             | <b>Life Time L70 / B50</b>              | 54000 h       |
| <b>Light Source</b>                    | LED, Light source not changeable              | <b>Life Time L80 / B10</b>              | 54000 h       |
| <b>Lightcolor</b>                      | Neutral white                                 |                                         |               |
| <b>Color Temperature</b>               | 4000 K                                        |                                         |               |
| <b>Colour Consistency</b>              | 6 SDCM                                        |                                         |               |
| <b>Colour consistency light source</b> | 6 SDCM                                        |                                         |               |
| <b>CRI (Ra)</b>                        | 90                                            |                                         |               |
| <b>Rated Angle of Reflection</b>       | 180 Degree                                    |                                         |               |
| <b>Luminous Flux 1m</b>                | 2160 lm                                       |                                         |               |
| <b>Luminous Efficiency 1m</b>          | 144 lm/W                                      |                                         |               |
| <b>LED/Meter</b>                       | 288                                           |                                         |               |
| <b>Segment Length</b>                  | 27.77 mm                                      |                                         |               |
| <b>Segment LED Quantity</b>            | 8                                             |                                         |               |
| <b>Switching Cycles</b>                | 27000                                         |                                         |               |
| <b>Power Consumption</b>               | 15 kWh/1000h                                  |                                         |               |
| <b>EEI</b>                             | C                                             |                                         |               |



Art.-Nr. 840472

Strip light  
Professional, COB, 24 V-15 W, 4000 K, IP67, 5 m

