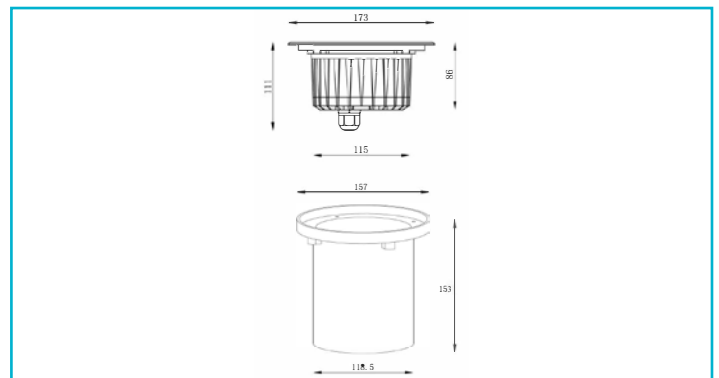


**Special features**

- Including 0.5 m connecting cable with WEIPU plug

Housing Material	Stainless steel, Aluminium
Housing Color	Silver
Material of Lens	Glass
Surface Structure of Lens	Transparent
Mounting Type	Installation mounting
Mounting Location	Outside
Mounting Area	Bottom panel mounting
UV resistance	Yes
Functions	Driveable - 20 kN

Protection Class	Protection class III/safety extra-low voltage
Operating Mode	Constant voltage
Rated Input	16.9 W
Rated Input Voltage	24 V/DC
Power Supply Unit incl.	No
Primary Connection	WEIPU plug 4-pole
Primary Cable Length	0.5 m
Connection Cable Secondary	Yes
Dimmable	Yes
Control	Dimmable via optional controller
Motion Detector	No

Light Source	LED, Light source not changeable
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
Rated Luminous Flux	650 lm
Luminous Efficiency	38 lm/W
Rated Angle of Reflection	50 Degree
Rated Angle of Reflection 2	35 Degree
Light Distribution	Asymetric
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Top
Height	111 mm
Diameter	173 mm
Installation Depth	153 mm
Cut Out Diameter	157 mm
Product weight	1750 g

Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 67
IK Protection Class	IK07
Load Force max.	20 kN
Life Time L70 / B50	25000 h
Switching Cycles	15000
Power Consumption	17 kWh/1000h

