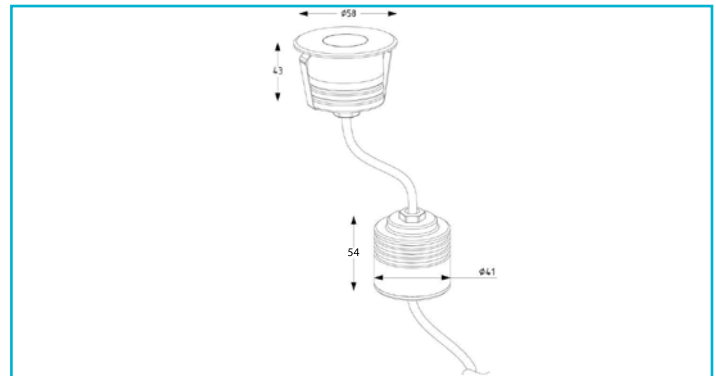


**Special features**

- Including 0.5 m connecting cable with protected connection socket

Housing Material	Stainless steel, Aluminium
Housing Color	Silver
Material of Lens	Glass
Mounting Type	Installation mounting
Mounting Location	Outside
Mounting Area	Bottom panel mounting
Ultraviolet resistance	Yes
Functions	Walkable - 5 kN

Protection Class	Protection class II/ protective insulation
Rated Input	2 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Cable Primary	Yes
Primary Connection	Connection box IP67
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	5 SDCM
Colour consistency light source	5 SDCM
CRI (Ra)	80
Rated Luminous Flux	150 lm
Luminous Efficiency	75 lm/W
Rated Angle of Reflection	30 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Top

Height	43 mm
Diameter	58 mm
Installation Depth	48 mm
Cut Out Diameter	44 mm
Product weight	339 g
Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 67
IK Protection Class	IK08
Load Force max.	5 kN
Max. units per MCB B10	43 PCS
Max. units per MCB B16	68 PCS
Max. units per MCB C10	71 PCS
Max. units per MCB C16	113 PCS

Life Time L70 / B50	25000 h
Switching Cycles	100000
Power Consumption	3 kWh/1000h
EEI	G

