


Surface-mounted wall light  
ShoreLine Pro Round, 1x max. 7,5 W GU10, dark grey

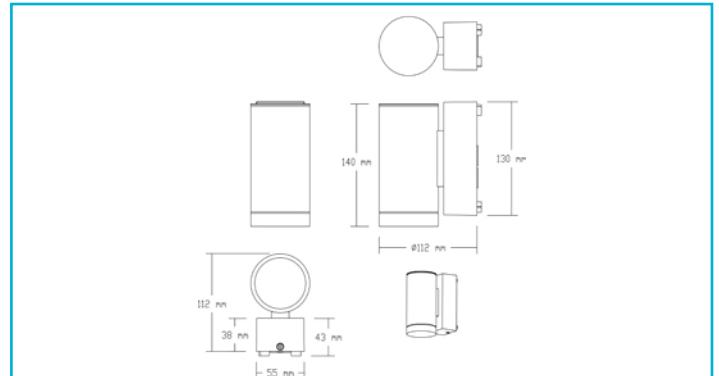

#### Special features

- continuous wiring possible
- seawater-resistant
- easy and quick installation
- separable mounting plate with plug-in connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting

|                                               |                                             |
|-----------------------------------------------|---------------------------------------------|
| <b>Housing Material</b>                       | Aluminium                                   |
| <b>Housing Color</b>                          | Dark grey                                   |
| <b>Material of Lens</b>                       | Glass                                       |
| <b>Colour of Lens</b>                         | Clear                                       |
| <b>Surface Structure of Lens</b>              | Clear                                       |
| <b>Mounting Type</b>                          | Top mounting                                |
| <b>Mounting Location</b>                      | Outside                                     |
| <b>Mounting Area</b>                          | Wall installation                           |
| <b>UV resistance</b>                          | Yes                                         |
| <b>Functions</b>                              | Nightsaver, Seawater resistant              |
| <b>Protection Class</b>                       | Protection class I/<br>protective grounding |
| <b>max. Power</b>                             | 1x max. 7.5 W                               |
| <b>Rated Input Voltage Frequency</b>          | 220-240 V/AC 50 / 60 Hz                     |
| <b>Socket Description</b>                     | GU10                                        |
| <b>Socket Quantity</b>                        | 1 PCS                                       |
| <b>Number of Cable Entries</b>                | 2 PCS                                       |
| <b>Dimmable</b>                               | Yes                                         |
| <b>Control</b>                                | Dimmable via optional light source          |
| <b>Motion Detector</b>                        | No                                          |
| <b>Height of Illuminant to be used max.</b>   | 58 mm                                       |
| <b>Diameter of Illuminant to be used max.</b> | 52 mm                                       |
| <b>Execution</b>                              | Without lamp                                |
| <b>Light Exit Surfaces</b>                    | 1                                           |
| <b>Light characteristics</b>                  | Direct                                      |
| <b>Light direction</b>                        | Below                                       |
| <b>Height</b>                                 | 140 mm                                      |
| <b>Diameter</b>                               | 68 mm                                       |
| <b>Base length</b>                            | 43 mm                                       |

|                            |                  |
|----------------------------|------------------|
| <b>Base L x W x H</b>      | 43 x 55 x 130 mm |
| <b>Base width</b>          | 55 mm            |
| <b>Base height</b>         | 130 mm           |
| <b>Product weight</b>      | 690 g            |
| <b>Working Temperature</b> | -20 to 45 °C     |
| <b>Storage Temperature</b> | -20 to 60 °C     |
| <b>IP Protection Class</b> | IP 65            |
| <b>IK Protection Class</b> | IK08             |

