


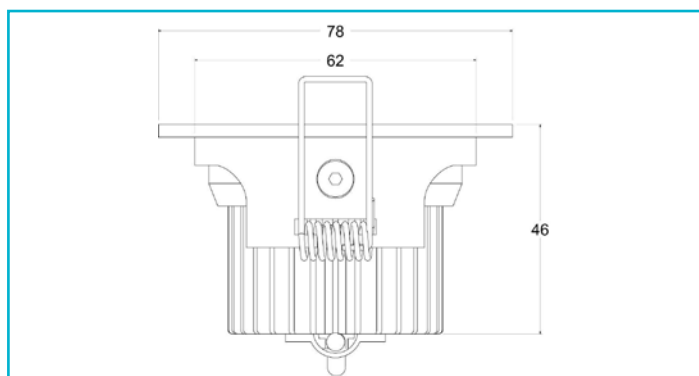

Housing Material	Aluminium
Housing Color	Silver
Surface structure	Brushed
Mounting Type	Installation mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class III/safety extra-low voltage
Operating Mode	Constant current
Rated Input	6 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage	16-17 V/DC
Rated Current	350 mA
Power Supply Unit incl.	No
Connection Cable Secondary	Yes
Secondary Cable Length	0.3 m
Dimmable	Yes
Control	Dimmable via optional power supply unit
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	90
Rated Luminous Flux	660 lm
Luminous Efficiency	110 lm/W
Rated Angle of Reflection	45 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Swivel Angle	25 Degree
---------------------	-----------

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	78 mm
Width	78 mm
Height	46 mm
Installation Depth	50 mm
Cut Out Diameter	68 mm
Product weight	156 g
Working Temperature	-5 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 20
Life Time L70 / B50	20000 h
Switching Cycles	10000
Power Consumption	6 kWh/1000h
EEI	D

