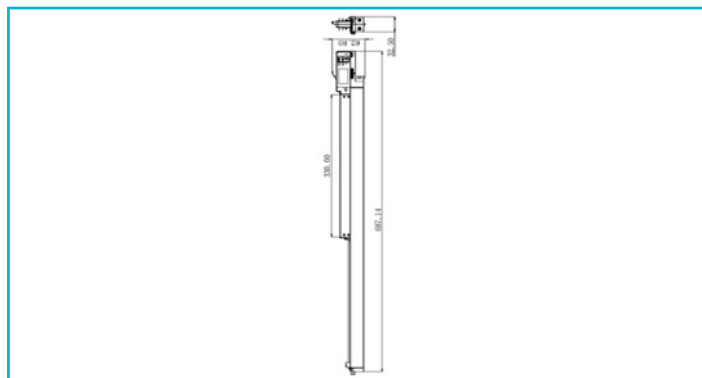
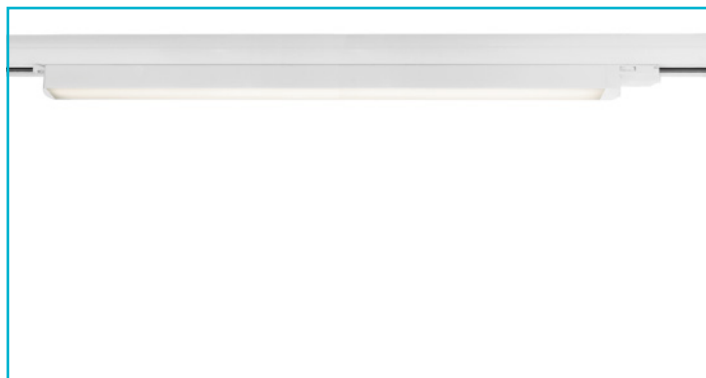


**Special features**

- low height
- homogeneous illumination

Housing Material	Aluminium
Housing Color	White
Surface structure	Matt
Material of Lens	Polycarbonate - PC
Mounting Location	Inside
Functions	Phase switch
Protection Class	Protection class II/ protective insulation
Rated Input	18 W
Rated Input Voltage Frequency	200-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

Working Temperature	-25 to 45 °C
Storage Temperature	-25 to 50 °C
Surface Temperature max.	45 °C
IP Protection Class	IP 20
Max. units per MCB B10	30 PCS
Max. units per MCB B16	48 PCS
Max. units per MCB C10	48 PCS
Max. units per MCB C16	80 PCS

Life Time L70 / B50	43800 h
Switching Cycles	50000
Power Consumption	18 kWh/1000h
EEL	E

Light Source	LED, Light source not changeable
Lightcolor	Neutral white
Color Temperature	4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	2300 lm
Luminous Efficiency	127.8 lm/W
Rated Angle of Reflection	110 Degree
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Length	687 mm
Width	32 mm
Height	62 mm
Product weight	520 g

