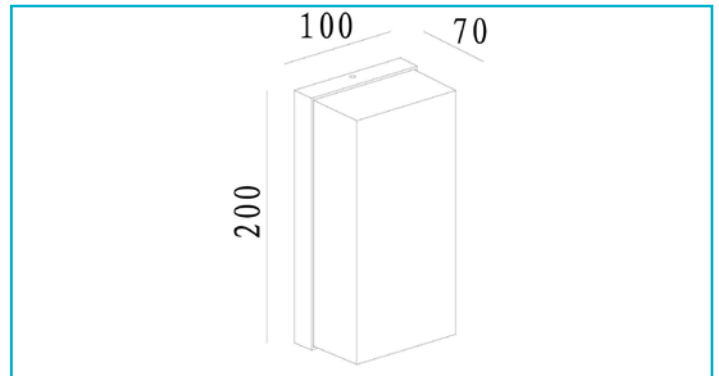


**Surface-mounted wall light**  
**Grumium Square CCT, 10 W, 3,000/4,000 K, grey**


Modular, compact, impactful - the GRUMIUM wall-mounted light can be installed on patios, building walls or in entrances to living spaces and, due to its optional covers in different designs, provides a flexible universal solution for many areas of application. The permanently installed and energy-saving LEDs delivering max. 10 watts are encompassed by a diffuser made of milky plastic and produce a pleasant warm-white light with a luminous flux of 730 lm. The Grumium outdoor light with die-cast aluminium housing comes in an angular and rounded design and has degree of protection IP54.

**Special features**

- light colour adjustable in 2 stages

|                                         |                                             |                            |                  |
|-----------------------------------------|---------------------------------------------|----------------------------|------------------|
| <b>Housing Material</b>                 | Aluminium                                   | <b>Height</b>              | 200 mm           |
| <b>Housing Color</b>                    | Dark grey                                   | <b>Base length</b>         | 95 mm            |
| <b>Material of Lens</b>                 | Plastic                                     | <b>Base L x W x H</b>      | 95 x 15 x 195 mm |
| <b>Colour of Lens</b>                   | White                                       | <b>Base width</b>          | 15 mm            |
| <b>Mounting Type</b>                    | Top mounting                                | <b>Base height</b>         | 195 mm           |
| <b>Mounting Location</b>                | Outside                                     | <b>Working Temperature</b> | -20 to 40 °C     |
| <b>Mounting Area</b>                    | Wall installation                           | <b>Storage Temperature</b> | -10 to 60 °C     |
| <b>Ultraviolet resistance</b>           | Yes                                         | <b>IP Protection Class</b> | IP 54            |
| <b>Protection Class</b>                 | Protection class I/<br>protective grounding | <b>Life Time L70 / B50</b> | 30000 h          |
| <b>Rated Input</b>                      | 10 W                                        | <b>Switching Cycles</b>    | 15000            |
| <b>Rated Input Voltage Frequency</b>    | 220-240 V/AC 50 / 60 Hz                     | <b>Power Consumption</b>   | 10 kWh/1000h     |
| <b>Power Supply Unit incl.</b>          | Yes                                         | <b>EEL</b>                 | F                |
| <b>Dimmable</b>                         | No                                          |                            |                  |
| <b>Motion Detector</b>                  | No                                          |                            |                  |
| <b>Light Source</b>                     | LED, Light source not changeable            |                            |                  |
| <b>Color Temperature</b>                | 3000/4000 K                                 |                            |                  |
| <b>Colour Consistency</b>               | 6 SDCM                                      |                            |                  |
| <b>Colour consistency light source</b>  | 6 SDCM                                      |                            |                  |
| <b>CRI (Ra)</b>                         | 80                                          |                            |                  |
| <b>Rated Luminous Flux</b>              | 530 lm                                      |                            |                  |
| <b>Luminous Efficiency</b>              | 53 lm/W                                     |                            |                  |
| <b>Rated Angle of Reflection</b>        | 138 Degree                                  |                            |                  |
| <b>Light Distribution</b>               | Symmetric                                   |                            |                  |
| <b>Distribution Characteristic 120°</b> | NDLS                                        |                            |                  |
| <b>Light Exit Surfaces</b>              | 1                                           |                            |                  |
| <b>Light characteristics</b>            | Direct, Indirect                            |                            |                  |
| <b>Light direction</b>                  | Top, Below, Side, Front                     |                            |                  |
| <b>Length</b>                           | 100 mm                                      |                            |                  |
| <b>Width</b>                            | 70 mm                                       |                            |                  |

