


Light sources

RF-smart, GU10, Zigbee, 4 W, RGB+2700-6500 K, 25 Degree

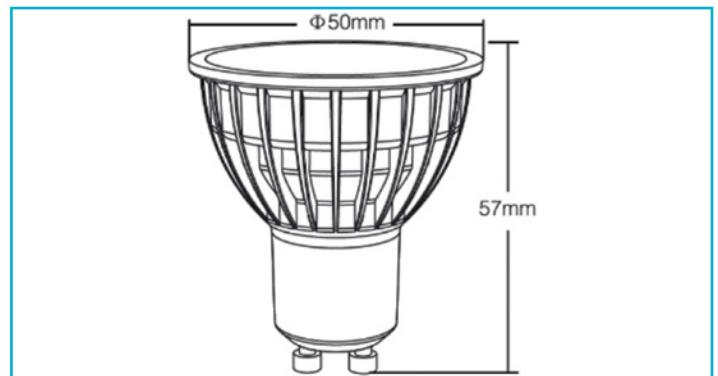

Special features

- Dimmable brightness and colour saturation
- 16 million available colours and adjustable colour temperature
- 18 pre-installed automatic programs
- Program and remote control synchronisation when operating multiple RF-smart components (repeater function)
- Can be controlled with RF-smart wireless remote controls (2.4 GHz, range approx. 30 m, not included in the scope of delivery)
- Can be controlled with all controllers/apps compatible with Zigbee 3.0, such as Amazon Echo (Alexa), Google Assistant and Tuya (relevant)

Housing Material	Plastic
Housing Color	White
Protection Class	Protection class II/ protective insulation
Rated Input	4 W
Rated Power Consumption Standby	0.4 W
Rated Power Consumption Network Standby	0.4 W
Rated Input Voltage	100-240 V/AC
Dimmable	Yes
Control	RF-Smart, ZigBee 3.0
Number of Channels	5
Power Factor	0.55
Lightcolor	RGB/warm white/cold white
Colour Temperature	2700-6500 K
Rated Luminous Flux	300 lm
Useful luminous flux	286 lm
CRI (Ra)	80
Rated Angle of Reflection	25 Degree
Distribution Characteristic 120°	DLS
Height	57 mm
Diameter	50 mm
Product weight	42 g
Flicker / LightFlicker - PstLM	0.5
Flicker / Stroboscopic Effect - SVM	0.01
Working Temperature	-10 to 45 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20
EEI	F

