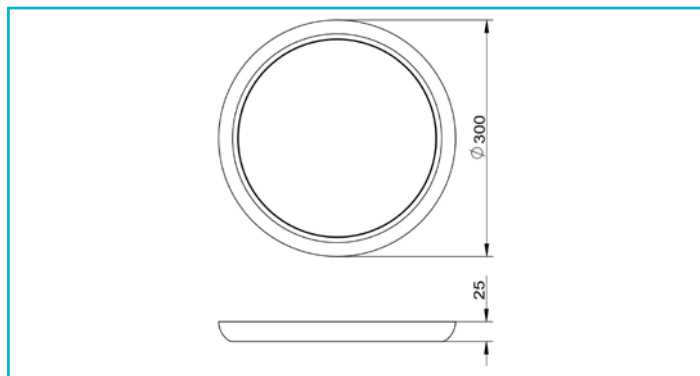


Downlight**Zaurak 300 mm, 18/25 W, 3000/4000/6000 K, white**

Recessed ceiling lights can be subtly integrated into private and commercial spaces, yet when it comes to replacing, the existing ceiling cut-out can present a problem. The ZAURAK series comes with an adjustable mounting clip, which can be used with larger and smaller ceiling cut-outs. In addition, the ZAURAK has a low installation depth for universal use. Two exchangeable cover rings in silver and black are included in the scope of delivery.

Special features

- Light colour adjustable in three stages
- Output adjustable in two stages
- Adjustable recess dimension 65-270 mm [model-dependent]
- Ideal renovation solution for ceiling recesses
- Incl. two colour rings [black/silver]

Housing Material	Plastic
Housing Color	White
Material of Lens	Plastic
Mounting Type	Top mounting, Installation mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class II/ protective insulation
Power Selectable	18 W, 25 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

Working Temperature	-20 to 0 °C
Storage Temperature	-20 to 40 °C
IP Protection Class	IP 44
IK Protection Class	IK03
Max. units per MCB B10	40 PCS
Max. units per MCB B16	70 PCS
Max. units per MCB C10	40 PCS
Max. units per MCB C16	70 PCS
Life Time L70 / B50	30000 h
Switching Cycles	15000
Power Consumption	25 kWh/1000h
EEI	G

Light Source	LED, Light source not changeable
Color Temperature	3000/4000/5700 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	2125/2375/2250 lm
Luminous Efficiency	96.8 lm/W
Rated Angle of Reflection	110 Degree
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Height	25 mm
Diameter	300 mm
Cut Out Diameter	150-270 mm
Product weight	1100 g

