


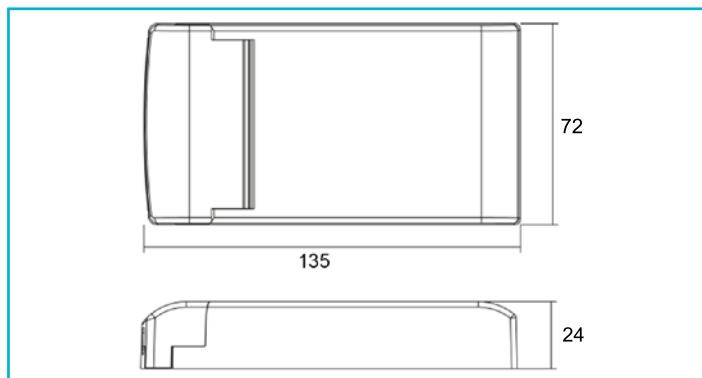

A must-have for every electrician: The MULTI-CURRENT DALI power supply units are all-purpose tools for universal use.

Can be actuated via DALI1 or DALI2 (fully forwards and backwards compatible) or via Intelli-Push. The MULTI-CURRENT power supply units do not require any additional control components and are controlled via cost-effective, 230 V standard push-buttons. With the new Intelli-Push function, you will still have a ground-breaking synchronisation option if one of the connected power supply units is no longer in sync with the others.

Special features

- Can be dimmed using Dali1/Dali2
- Can be dimmed using 230 V push button [on/off, brightness]
- Intelli-Push function [shortcut synchronises all connected power supply units when needed]
- Current range adjustable using DIP switch
- Can be operated without actuation/dimming
- Dimming range 1-100 %
- Flicker-free
- Short circuit/overload protection, overheating protection

Housing Material	Plastic
Housing Color	Black
Functions	Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection

Product weight	166 g
-----------------------	-------

Operating Mode	Constant current
Protection Class	Protection class II/protective insulation
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power	8.7-45 W
Output Voltage	25-56 V/DC
Output Current Selectable	350 mA, 500 mA, 600 mA, 700 mA, 800 mA, 900 mA, 1050 mA
Dimmable	Yes
Min./max. dimming range	1-100 %
Control	DALI 2 / DT6, Intelli Push-Dim
Number of Channels	1
Power Factor	0.98

Max. units per MCB B10	13
Max. units per MCB B16	20
Max. units per MCB C10	27
Max. units per MCB C16	44
Inrush Current max.	20 A / 100 µs
Capacitive Load	180.8 nF
Reference Point Tc	85 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20

Length	135 mm
Width	72 mm
Height	24 mm

Multi-CC variable power/voltage ranges		
Current	Power	Voltage
350mA	8,75W - 24,50W	25V - 70V
500mA	12,50W - 35,00W	25V - 70V
600mA	15,00W - 42,00W	25V - 70V
700mA	17,50W - 45,00W	25V - 64V
800mA	20,00W - 45,00W	25V - 56V
900mA	22,50W - 45,00W	25V - 50V
1000mA	25,00W - 45,00W	21V - 43V
max. 2 lamps per channel - check voltage range!		
		

