

Artikel Nr.: 100045

Einlegerasterleuchte, LED Panel PRO, Verkehrsweiß RAL 9016, 35V DC, Kaltweiß

Technische Daten

Charakteristik

Material	Aluminium
Farbe	Verkehrsweiß RAL 9016
Optik	
im Lieferumfang	1 x Safety Kit



Elektrische Daten

Leistung	36,00 W
Eingangsspannung	35V DC
Eingangsstrom	1050 mA
Fassung / Sockel	
Anzahl Sockel	
Netzgerät	exkl. LED-Netzgerät
Ansteuerung	dimmbar über optionales Netzgerät
Anschlussmöglichkeit	offene Kabel
Schutzklasse I, II, III	III




Artikel Nr.: 100045

Einlegerasterleuchte, LED Panel PRO, Verkehrsweiß RAL 9016, 35V DC, Kaltweiß

Lichtrichtung

Dreh- und Schwenkbereich	feststehend
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	symmetrisch

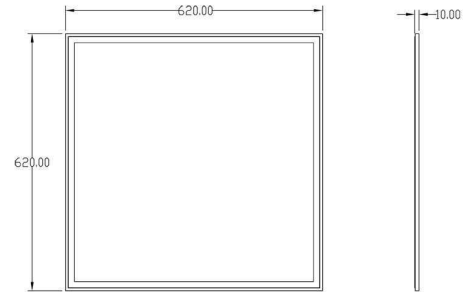

Abmessungen und Gewicht

Länge	620,00
Breite	620,00
Höhe	10,00
Durchmesser	0,00
Einbautiefe	0,00
Gewicht	4000 g

Ausschnittsmaß

Länge	0,00
Breite	0,00
Durchmesser	0,00

Artikel Nr.: 100045

Einlegerasterleuchte, LED Panel PRO, Verkehrsweiß RAL 9016, 35V DC, Kaltweiß

Grenzwerte

Betriebstemperatur	-5°C - +40°C
Lagertemperatur	-10°C - +40°C
IP - Schutzart	IP20

EEI	Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F
IP20	Schutz gegen das Eindringen von Fremdkörper > 50 mm. Kein Schutz gegen das Eindringen von Wasser.
	Leuchte der Schutzklasse III Leuchte, bei der der Schutz gegen elektrischen Schlag auf der Anwendung der Schutzkleinspannung (SELV) beruht und in der Spannungen höher als SELV nicht erzeugt werden.
	Aufgrund des komplexen Herstellungsprozesses von LED stellen die angegebenen Werte nur rein statistische Größen dar und müssen nicht zwingend den tatsächlichen Parametern jedes einzelnen LED-Moduls entsprechen, sondern können von den typischen Werten abweichen.


Article no.: 100045

Inlay raster lamp, LED Panel PRO, Traffic white RAL 9016, 35V DC, coldwhite

Technical Data

General Characteristics

Material	aluminum
Colour	Traffic white RAL 9016
Optics	
included in delivery	1 x Safety Kit

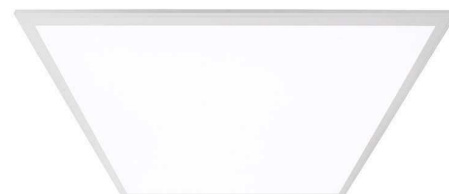

Electrical Characteristics

Power	36,00 W
input voltage	35V DC
input current	1050 mA
Base (standard designation)	
Number of bases	
Power supply unit	excl. LED-power supply unit
Electronically reversible	dimnable via optional power supply
Connection possibility	wire with open ends
Protection class I, II, III	III




Article no.: 100045

Inlay raster lamp, LED Panel PRO, Traffic white RAL 9016, 35V DC, coldwhite

Light Direction

Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	symmetrisch

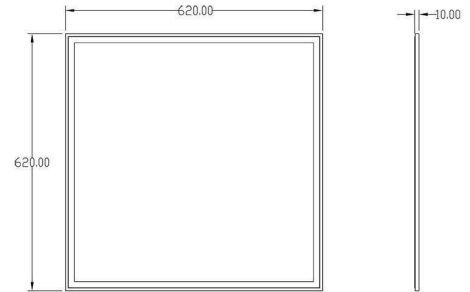**Dimensions & Weight**

Length	620,00
Width	620,00
Height	10,00
Diameter	0,00
Mounting Depth	0,00
Product Weight	4000 g

Cut-out dimensions

Length	0,00
Width	0,00
Diameter	0,00

Article no.: 100045

Inlay raster lamp, LED Panel PRO, Traffic white RAL 9016, 35V DC, coldwhite

Absolute maximum ratings

Working temperature	-5°C - +40°C
Storage temperature	-10°C - +40°C
IP - Code	IP20

EEI	This product contains a light source of energy efficiency class F
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class III Luminaire in which protection against electric shock relies on supply at safety extra-low voltage (SELV) and in which voltages higher than those of SELV are not generated.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.