


Art. no. 862161

Power supply unit (CV, DC) dimmable BASIC, DIM, CV,
200AD-24 V, DALI BUS/PUSH/1-10 V

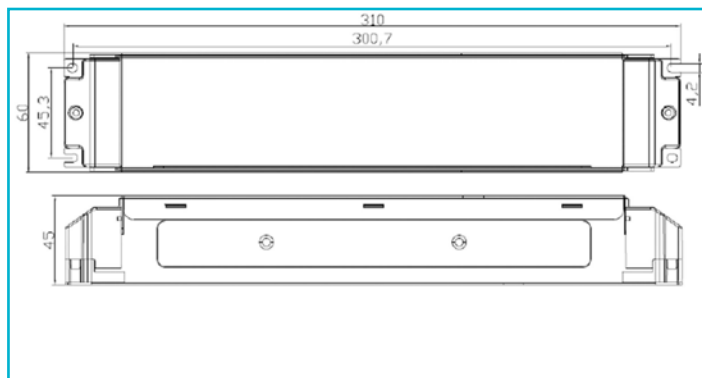

Special features

- Can be dimmed using DALI1
- Can be dimmed using 0-10 V
- Touch-dimmer function (push)
- Power supply unit and PWM dimmer in one device
- Short-circuit-proof, overload protection, overheating protection

Housing Material	Aluminium
Housing Color	Black
Operating Mode	Constant voltage
Protection Class	Protection class I/protective grounding
Power	200 W
Output Voltage	24 V/DC
Output Current	0-8300 mA
Dimmable	Yes
Control	DALI 1 / DT6, Push-Dim, 1-10 V
Number of Channels	1
Max. units per MCB B10	4
Max. units per MCB B16	6
Max. units per MCB C10	7
Max. units per MCB C16	12
Inrush Current max.	27 A / 650 µs
Reference Point Tc	90 °C
Working Temperature	-20 to 50 °C
IP Protection Class	IP 20
Length	310 mm
Width	60 mm
Height	45 mm
Product weight	808 g

