


Three-phase light

Linear Pro Soft 600, 14/16/18/20 W, DALI, 3000 K, black

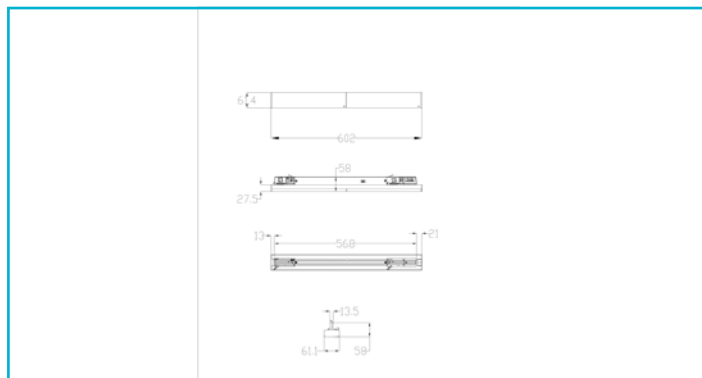

The LINEAR PRO DALI three-phase busbar light is the ideal solution for lighting sales racks. It is ideally suited for lighting aisles due its special design. This enables it to illuminate conventional application scenarios on both sides of the aisle evenly over the entire height. At the same time, the diffused light insert in the centre ensures uniform illumination of the aisle itself.

Thanks to its eligibility for German federal funding for energy-efficient buildings (BEG), you can benefit from financial advantages. This light is

Special features


- Eligible for BEG German federal funding for energy-efficient buildings
- Emergency power capable [198-264 V/DC EOFI: 15 %]
- Long service life of 60,000 hours [L80B50]
- Particularly energy efficient

Housing Material	Aluminium
Housing Color	Black
Material of Lens	Polycarbonate - PC
Colour of Lens	White
Surface Structure of Lens	Opal
Mounting Type	Installation mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Functions	Emergency power capable, Phase switch
Protection Class	Protection class I/ protective grounding
Power Selectable	14 W, 16 W, 18 W, 20 W
Rated Input Voltage Frequency	198-264 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	DALI 2 / DT6
Motion Detector	No
Voltage range DC	198-264 V/DC
Voltage range emergency lighting	198-264 V/DC
EOFI	15 %

Light Source	LED, Light source changeable TC
Lightcolor	Warm white (WW)
Color Temperature	3000 K
Colour Consistency	5 SDCM
Colour consistency light source	5 SDCM
CRI (Ra)	90
Rated Luminous Flux	2800 lm
Luminous Efficiency	140 lm/W
Rated Angle of Reflection	120 Degree
UGR	30
Light Distribution	Symmetric

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	602 mm
Width	61.1 mm
Height	58 mm
Product weight	644 g

Working Temperature	-25 to 40 °C
Storage Temperature	-40 to 85 °C
Surface Temperature max.	46 °C
IP Protection Class	IP 20
IK Protection Class	IK03
Inrush Current max.	21 A / 120 µs
Max. units per MCB B10	30
Max. units per MCB B16	48
Max. units per MCB C10	50
Max. units per MCB C16	80

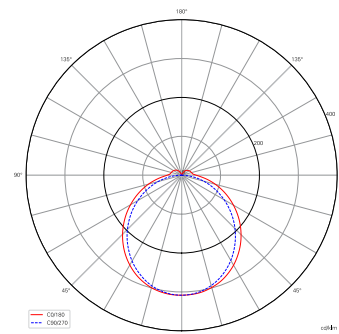

Art.-Nr. 707220



Three-phase light
Linear Pro Soft 600, 14/16/18/20 W, DALI, 3000 K, black

Life Time L70 / B50	60000 h
Life Time L80 / B50	60000 h
Switching Cycles	100000
Power Consumption	20 kWh/1000h
Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class C.