
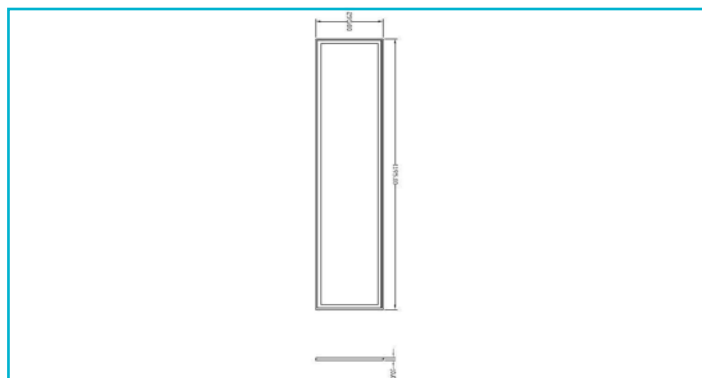


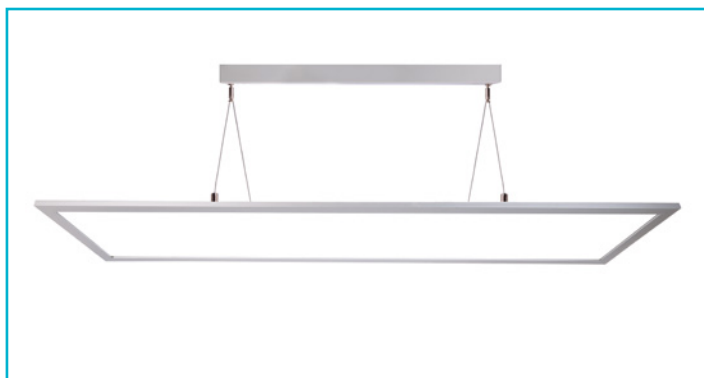

The LED pendant lamp has transparent glass for direct and indirect light distribution that is almost see-through when switched off. When the light is switched on, the pane distributes the light almost entirely without glare.

This pendant lamp is fully office-compatible with a glare value [UGR] of under 19. Bright, efficient and with a sophisticated design, this light not only stands out in any type of office environment.

Special features

- Very low glare value
- Light colour adjustable in 2 stages
- Transparent luminous element
- Max. suspended mounting 1,800 mm

Housing Material	Aluminium	IP Protection Class	IP 20
Housing Color	Aluminum	Life Time L70 / B50	50000 h
Material of Lens	Acryl	Switching Cycles	12500
Protection Class	Protection class I/ protective grounding	Power Consumption	51 kWh/1000h
Rated Input	51 W	Energy Efficiency Class	G
Rated Input Voltage min./max. Frequency	220-240 V/AC 50 / 60 Hz		
Power Supply Unit incl.	Yes		
Connection Type	Clamp		
Control	Leading-edge dimmer, Trailing edge dimmer		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Color Temperature	4000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	6000 lm		
Rated Angle of Reflection	155 Degree		
UGR	19		
Light Distribution	Symmetric		
Distribution Characteristic 120°	NDLS		
Light Exit Surfaces	2		
Light characteristics	Direct		
Light direction	Top, Below		
Depth	1195 mm		
Width	295 mm		
Height	11 mm		
Pendulum Length max.	1500 mm		
Working Temperature	-5 to 40 °C		
Storage Temperature	-10 to 40 °C		