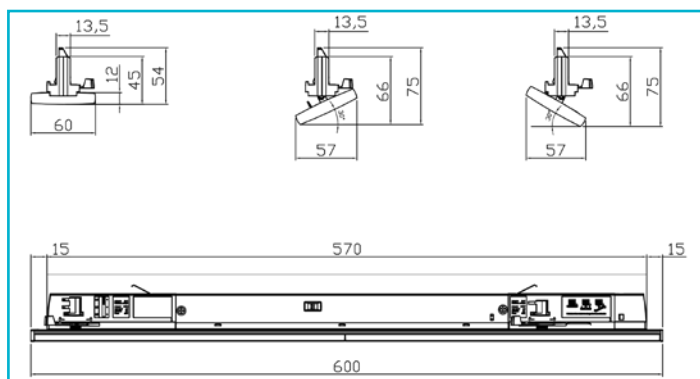


Three-phase light
Linear Pro, Tilt 600, 14/16/18/20 W, 4000 K, white


The LINEAR PRO TILT 3-phase current track light is the ideal solution for illuminating sales racks. This light provides the perfect combination of functionality and versatility. It can be locked downwards or swivelled to each side by up to 30° so the light can be directed precisely. Thanks to its eligibility for German federal funding for energy-efficient buildings (BEG), you can benefit from financial advantages. This light is a long-term investment with a long service life of 60,000 hours [L80B50]. The power can be adjusted in three stages [except for the DALI models] for lighting that perfectly suits requirements.

The 1,500 mm variants have a sliding busbar adapter and are each

Special features


- Eligible for BEG German federal funding for energy-efficient buildings
- Emergency power capable [198-264 V/DC EOFI: 100 %]
- Can be locked shining downwards
- Can be swivelled up to 30° to each side
- Long service life of 60,000 hours [L80B50]
- Particularly energy efficient
- Output adjustable in three stages

Housing Material	Steel
Housing Color	White
Material of Lens	PMMA
Mounting Type	Installation mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Functions	Emergency power capable, Phase switch
Protection Class	Protection class I/ protective grounding
Power Selectable	14 W, 16 W, 18 W, 20 W
Rated Input Voltage Frequency	198-264 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No
Voltage range DC	198-264 V/DC
Voltage range emergency lighting	198-264 V/DC
EOFI	100 %

Light Source	LED, Light source changeable TC
Lightcolor	Neutral white
Color Temperature	4000 K
Colour Consistency	3 SDCM
Colour consistency light source	3 SDCM
CRI (Ra)	90
Rated Luminous Flux	3200 lm
Luminous Efficiency	160 lm/W
Rated Angle of Reflection	60 Degree
UGR	19
Light Distribution	Symmetric

Swivel Angle	60 Degree
Light Exit Surfaces	1

Light characteristics	Direct
Light direction	Below
Length	600 mm
Width	60 mm
Height	54 mm
Product weight	700 g
Working Temperature	-25 to 40 °C
Storage Temperature	-40 to 85 °C
Surface Temperature max.	46 °C
IP Protection Class	IP 20
IK Protection Class	IK03
Max. units per MCB B10	30 PCS
Max. units per MCB B16	38 PCS
Max. units per MCB C10	30 PCS
Max. units per MCB C16	48 PCS
Life Time L70 / B50	60000 h
Life Time L80 / B50	60000 h
Switching Cycles	100000

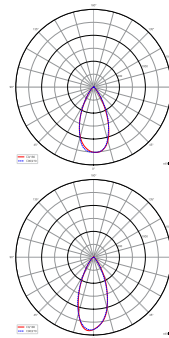

Art.-Nr. 707141



Three-phase light
Linear Pro, Tilt 600, 14/16/18/20 W, 4000 K, white

Power Consumption	20 kWh/1000h
Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class B.