


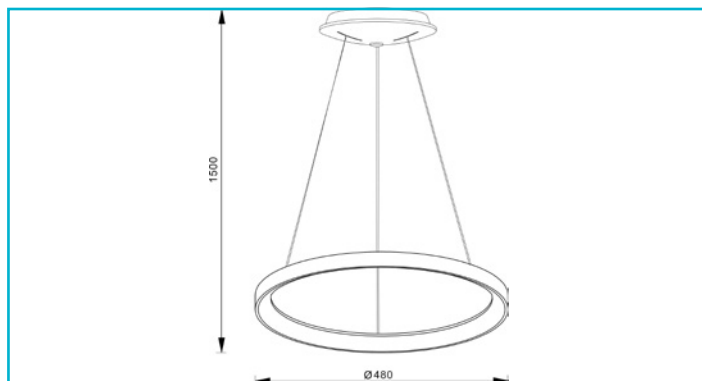

The pendant lamps of the MEROPE series combine timeless elegance and subdued modernity. Available in the diameters 380, 580 and 780 mm, the light colour [3,000/4,000 K] can be selected before installation using a CCT switch. The exterior finish is brushed aluminium in the colours coffee and silver or matt powder-coated in black and white.

Special features

- Light colour adjustable in two stages
- Can be suspended by up to 1,800/3,000 mm [depending on model]

Housing Material	Aluminium
Housing Color	Coffee
Housing Surface	Brushed
Material of Lens	Acryl
Colour of Lens	White
Surface Structure of Lens	Opal
Protection Class	Protection class I/protective grounding
Rated Input	35 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Clamp
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	80
Rated Luminous Flux	2990 lm
Rated Angle of Reflection	130 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Height	35 mm
Diameter	480 mm
Base height	65 mm

Base diameter	230 mm
Pendulum Length max.	1500 mm
Working Temperature	-10 to 45 °C
Storage Temperature	-10 to 45 °C
IP Protection Class	IP 20
IK Protection Class	IK04
Life Time L70 / B50	30000 h
Switching Cycles	25000
Power Consumption EEI	35 kWh/1000h E