


Surface-mounted wall light
Alkes L Motion, 36 W, 3,000 K, grey

IP65

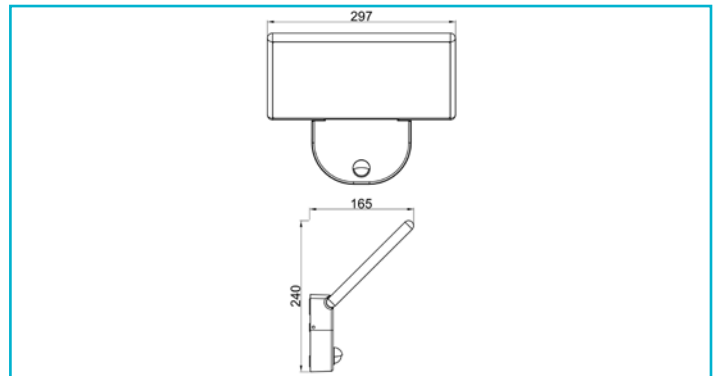

The ALKES MOTION series is not a traditional wall-mounted light, but is closer to a floodlight with its SMD-LED panel. The highlight: The upper housing part is tilted forwards 45° from the façade to direct the warm white light in a targeted manner onto the surface to be illuminated. In addition, the ALKES also looks great when switched off with its modern design and rounded edges.

Special features

- high luminous efficacy
- homogeneous light distribution

Housing Material	Aluminium
Housing Color	Dark grey
Material of Lens	Glass
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
Ultraviolet resistance	Yes
Protection Class	Protection class I/ protective grounding
Rated Input	36 W
Rated Power Consumption Network Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	Yes
Kind of Motion Detector	Infrared
Detection Distance	1-8 m
Angle of Detection	110 Degree
Motion detector changeable	Yes
Adjustable brightness threshold	Yes
Brightness threshold	0-1000 lx
Adjustable follow-up time	Yes
Follow-up time	8-300 s

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	1720 lm
Luminous Efficiency	47.8 lm/W
Rated Angle of Reflection	110 Degree

Distribution Characteristic 120°	DLS
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Length	297 mm
Width	165 mm
Height	240 mm

Working Temperature	-20 to 50 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 65
Max. units per MCB B10	60 PCS
Max. units per MCB B16	96 PCS
Max. units per MCB C10	96 PCS
Max. units per MCB C16	154 PCS

Life Time L70 / B50	26500 h
Switching Cycles	15000
Power Consumption EEI	36 kWh/1000h

