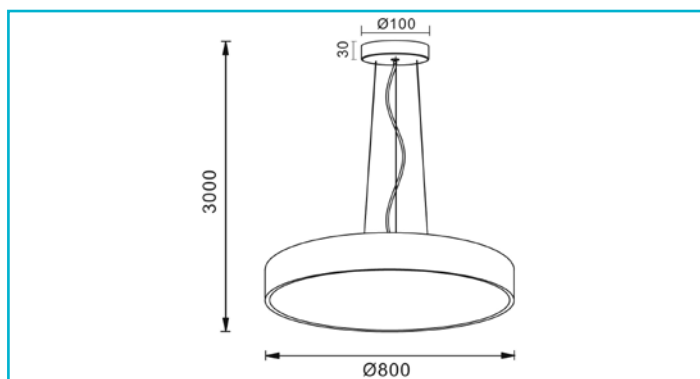


Pendant lamp**Menkar 800 mm, 90 W, 3,000/4,000 K, black**

The pendant lights in the MENKAR series impress with clever lighting functions and high-quality aluminium accents. The separate rear light (approx. 15 - 20 % indirect light component) enables permanent indirect lighting. The light colour can be adjusted in 2 stages [3000/4000K] via a CCT switch.

Special features

- Indirect and direct lighting
- High light intensity
- Light colour adjustable in two stages
- Can be suspended by up to 1,800/3,000 mm [depending on model]
- Optional diffuser lens for UGR<19

Housing Material	Aluminium
Housing Color	Black
Surface structure	Matt
Material of Lens	Acryl
Surface Structure of Lens	Satined
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class I/ protective grounding
Rated Input	90 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source changeable TC
Color Temperature	3000/4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	8400/8700 lm
Luminous Efficiency	96.7 lm/W
UGR	25
Light Distribution	Symmetric

Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below

Height	90 mm
---------------	-------

Diameter	800 mm
Base height	30 mm
Base H x Ø	30 x 150 mm
Base diameter	150 mm
Pendulum Length max.	3000 mm

Working Temperature	-10 to 45 °C
Storage Temperature	-10 to 45 °C
IP Protection Class	IP 20
IK Protection Class	IK04
Max. units per MCB B10	11 PCS
Max. units per MCB B16	18 PCS
Max. units per MCB C10	24 PCS
Max. units per MCB C16	39 PCS

Life Time L70 / B50	30000 h
Switching Cycles	20000
Power Consumption	90 kWh/1000h

Energy Efficiency Class Lightsource This product contains light sources of energy efficiency classes E and F.

