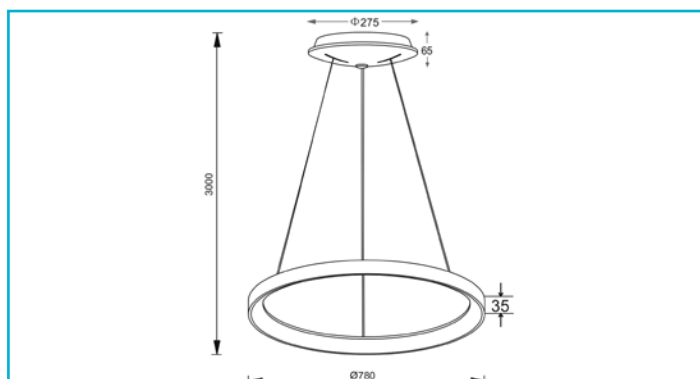


Pendant lamp**Merope 800, 60 W, DIM, 3,000/4,000 K, dark brown**

The pendant lamps of the MEROPE series combine timeless elegance and subdued modernity. Available in the diameters 380, 580 and 780 mm, the light colour [3,000/4,000 K] can be selected before installation using a CCT switch. The exterior finish is brushed aluminium in the colours coffee and silver or matt powder-coated in black and white.

Special features

- Light colour adjustable in two stages
- Can be suspended by up to 1,800/3,000 mm [depending on model]

Housing Material	Aluminium
Housing Color	Dark brown
Surface structure	Brushed
Material of Lens	Acryl
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class I/ protective grounding
Rated Input	60 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source changeable TC
Color Temperature	3000/4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	4800/4900 lm
Luminous Efficiency	81.7 lm/W
Light Distribution	Symmetric

Light Exit Surfaces	1
Light characteristics	Direct, Indirect
Light direction	Top, Below

Height	35 mm
Diameter	780 mm
Base height	65 mm

Base H x Ø	65 x 275 mm
Base diameter	275 mm
Pendulum Length max.	3000 mm

Working Temperature	-10 to 45 °C
Storage Temperature	-10 to 45 °C
IP Protection Class	IP 20
IK Protection Class	IK04
Max. units per MCB B10	17 PCS
Max. units per MCB B16	28 PCS
Max. units per MCB C10	37 PCS
Max. units per MCB C16	59 PCS

Life Time L70 / B50	30000 h
Switching Cycles	20000
Power Consumption	60 kWh/1000h
Energy Efficiency Class Lightsources	This product contains a light source of energy efficiency class F.

