
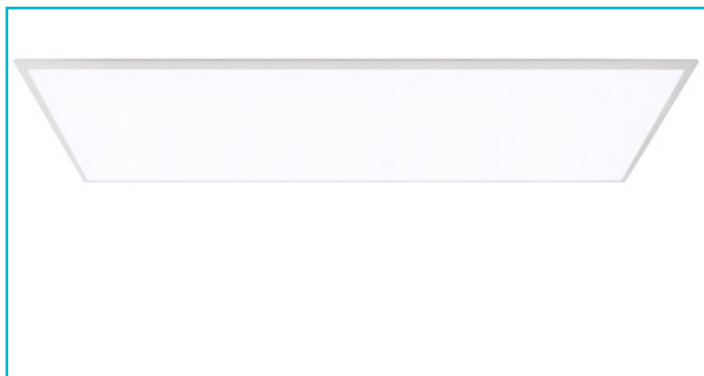


## LED panel

Standard Office Flex 300x1,200 mm, 40 W, DIM, 3,000/4,000/5,700 K, white

**Special features**

- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Suitable for pendant mounting
- Suitable for office spaces, reception rooms, hallways
- Light colour adjustable in three stages
- Suitable for workplaces with screens in accordance with EN 12464-1 BAP65
- Microprismatic surface structure

|                                           |                                               |
|-------------------------------------------|-----------------------------------------------|
| <b>Housing Material</b>                   | Aluminium                                     |
| <b>Housing Color</b>                      | White                                         |
| <b>Suitable for Computer Workstations</b> | Yes                                           |
| <b>Mounting Type</b>                      | Installation mounting                         |
| <b>Mounting Location</b>                  | Inside                                        |
| <b>Mounting Area</b>                      | Ceiling installation                          |
| <b>Protection Class</b>                   | Protection class II/<br>protective insulation |
| <b>Rated Input</b>                        | 40 W                                          |
| <b>Rated Power Consumption Standby</b>    | 0.5 W                                         |
| <b>Rated Input Voltage Frequency</b>      | 220-240 V/AC 50 / 60 Hz                       |
| <b>Power Supply Unit incl.</b>            | Yes                                           |
| <b>Dimmable</b>                           | Yes                                           |
| <b>Control</b>                            | Leading-edge dimmer,<br>Trailing-edge dimmer  |
| <b>Motion Detector</b>                    | No                                            |

|                               |              |
|-------------------------------|--------------|
| <b>Width</b>                  | 295 mm       |
| <b>Height</b>                 | 10 mm        |
| <b>Product weight</b>         | 3159 g       |
| <b>Working Temperature</b>    | -20 to 40 °C |
| <b>Storage Temperature</b>    | -20 to 40 °C |
| <b>IP Protection Class</b>    | IP 20        |
| <b>IK Protection Class</b>    | IK08         |
| <b>Max. units per MCB B10</b> | 40 PCS       |
| <b>Max. units per MCB B16</b> | 64 PCS       |
| <b>Max. units per MCB C10</b> | 40 PCS       |
| <b>Max. units per MCB C16</b> | 64 PCS       |
| <b>Life Time L70 / B50</b>    | 30000 h      |
| <b>Switching Cycles</b>       | 15000        |
| <b>Power Consumption</b>      | 40 kWh/1000h |
| <b>EEI</b>                    | F            |

|                                         |                                     |
|-----------------------------------------|-------------------------------------|
| <b>Light Source</b>                     | LED, Light source not<br>changeable |
| <b>Color Temperature</b>                | 3000/4000/5700 K                    |
| <b>Colour Consistency</b>               | 6 SDCM                              |
| <b>Colour consistency light source</b>  | 6 SDCM                              |
| <b>CRI (Ra)</b>                         | 90                                  |
| <b>Rated Luminous Flux</b>              | 3500 lm                             |
| <b>Luminous Efficiency</b>              | 87.5 lm/W                           |
| <b>Rated Angle of Reflection</b>        | 100 Degree                          |
| <b>UGR</b>                              | 19                                  |
| <b>Distribution Characteristic 120°</b> | DLS                                 |

|                              |        |
|------------------------------|--------|
| <b>Light Exit Surfaces</b>   | 1      |
| <b>Light characteristics</b> | Direct |
| <b>Light direction</b>       | Below  |

|               |         |
|---------------|---------|
| <b>Length</b> | 1195 mm |
|---------------|---------|

