


Surface-mounted wall light
Cubodo A, 5.7 W, 3,000 K, dark grey


Housing Material	Aluminium	Width	110 mm
Housing Color	Dark grey	Height	90 mm
Material of Lens	Glass	Base length	59 mm
Mounting Type	Top mounting	Base L x W x H	59 x 59 x 20 mm
Mounting Location	Outside	Base width	59 mm
Mounting Area	Wall installation	Base height	20 mm
Ultraviolet resistance	Yes		
Functions	Nightsaver	Working Temperature	-5 to 40 °C
		Storage Temperature	-10 to 60 °C
Protection Class	Protection class I/ protective grounding	IP Protection Class	IP 54
Rated Input	5.7 W	Max. units per MCB B10	32 PCS
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz	Max. units per MCB B16	51 PCS
Power Supply Unit incl.	Yes	Max. units per MCB C10	51 PCS
Dimmable	No	Max. units per MCB C16	81 PCS
Motion Detector	No		
Light Source	LED, Light source not changeable	Life Time L70 / B50	30000 h
Color Temperature	3000 K	Switching Cycles	100000
Colour Consistency	6 SDCM	Power Consumption	6 kWh/1000h
Colour consistency light source	6 SDCM	EEI	G
CRI (Ra)	80		
Rated Luminous Flux	270 lm		
Luminous Efficiency	47.4 lm/W		
Rated Angle of Reflection	80 Degree		
Rated Angle of Reflection 2	40 Degree		
Light Distribution	Symmetric		
Distribution Characteristic 120°	DLS		
Light Exit Surfaces	2		
Light characteristics	Direct, Indirect		
Light direction	Top, Below		
Length	90 mm		

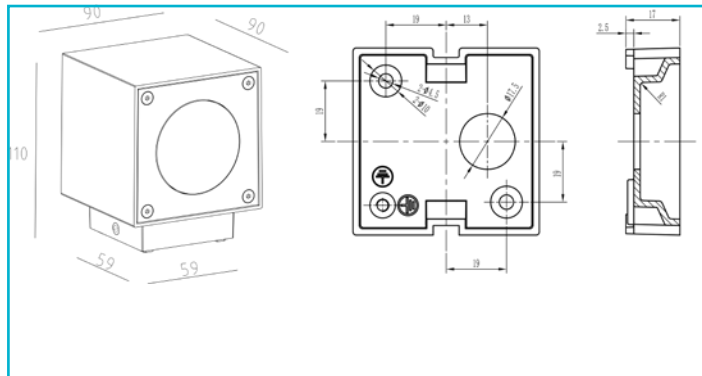