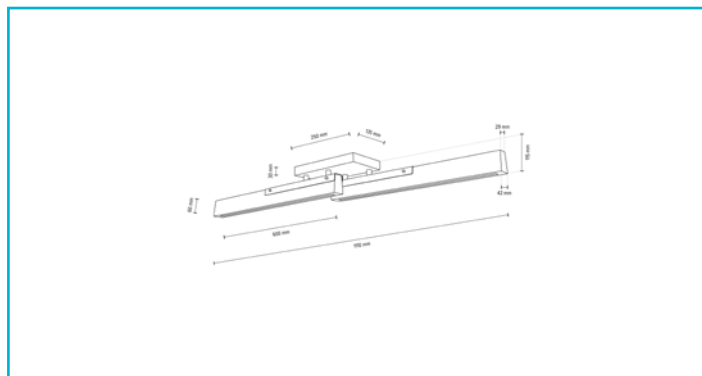


Surface-mounted ceiling light
Madera, 22 W, DIM, 3,000 K, natural oak


The MADERA series is made from premium European oak and captivates with its modern design and mix of materials in private living areas, hotels, restaurants and many more places too.

The elegant MADERA lamps distribute their powerful warm white light in every room and also cut an excellent figure providing functional and high-quality lighting at reception desks and elsewhere.

Special features

- Manufactured in Europe from high-quality class A oak
- FSC-certified oak raw material from sustainable forestry sources
- Incl. indirect upward lighting

Housing Material	Wood, Steel	Base L x W x H	250 x 135 x 30 mm
Housing Color	Brown, Black	Base width	135 mm
Surface Structure of Lens	Opal	Base height	30 mm
Mounting Type	Top mounting	Working Temperature	-25 to 45 °C
Mounting Location	Inside	Storage Temperature	-25 to 60 °C
Mounting Area	Ceiling installation	IP Protection Class	IP 20
Protection Class	Protection class II/ protective insulation	Life Time L90 / B10	54000 h
Rated Input	22 W	Switching Cycles	50000
Rated Power Consumption Standby	0.5 W	Power Consumption	22 kWh/1000h
Rated Input Voltage Frequency	100-240 V/AC 50 / 60 Hz	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class D.
Power Supply Unit incl.	Yes		
Dimmable	Yes		
Control	Leading-edge dimmer		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
CRI (Ra)	85		
Rated Luminous Flux	2740 lm		
Luminous Efficiency	124.5 lm/W		
Light Distribution	Symmetric		
Light Exit Surfaces	4		
Light characteristics	Direct, Indirect		
Light direction	Top, Below		
Length	1100 mm		
Width	42 mm		
Height	60 mm		
Base length	250 mm		

