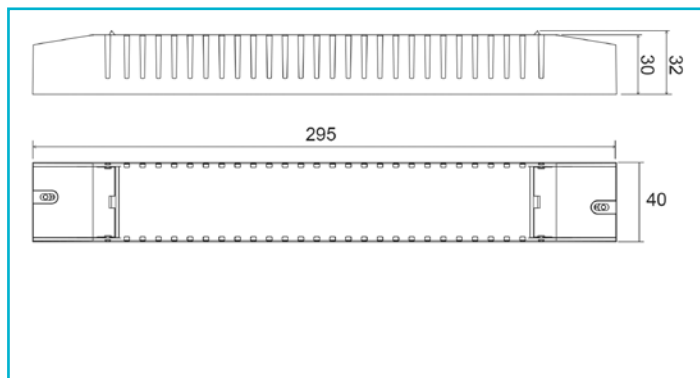


**Power supply unit (CV, DC) dimmable**  
**Basic, Casambi 3/4 channel, 24 V, 150 W, IP20**
**Special features**

- Dimmable/can be controlled with Casambi via Bluetooth 4.0/5.1 Low Energy (BLE)
- Power supply unit and Casambi dimmer in one device
- Compact design
- Flicker-free (20 kHz)
- Secured against short circuits and overloads
- Overheating protection

|                         |                                                                                                                                                                               |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Housing Material</b> | Plastic                                                                                                                                                                       |
| <b>Housing Color</b>    | White                                                                                                                                                                         |
| <b>Functions</b>        | Bluetooth data transfer, Short-circuit proof, Protective extra-low voltage, Overloading protection, Lamp control gear 110, Furniture installation, Overtemperature protection |

|                                      |                                           |
|--------------------------------------|-------------------------------------------|
| <b>Operating Mode</b>                | Constant voltage                          |
| <b>Protection Class</b>              | Protection class II/protective insulation |
| <b>Rated Input Voltage Frequency</b> | 220-240 V/AC 50 / 60 Hz                   |
| <b>Power</b>                         | 150 W                                     |
| <b>Output Voltage</b>                | 24 V/DC                                   |
| <b>Output Current</b>                | 0-6250 mA                                 |
| <b>Dimmable</b>                      | Yes                                       |
| <b>Min./max. dimming range</b>       | 1-100 %                                   |
| <b>Control</b>                       | Casambi                                   |
| <b>Number of Channels</b>            | 3, 4                                      |
| <b>Power Factor</b>                  | 0.98                                      |

|                               |                 |
|-------------------------------|-----------------|
| <b>Max. units per MCB B10</b> | 5 PCS           |
| <b>Max. units per MCB B16</b> | 9 PCS           |
| <b>Max. units per MCB C10</b> | 9 PCS           |
| <b>Max. units per MCB C16</b> | 15 PCS          |
| <b>Inrush Current max.</b>    | 63.4 A / 220 µs |
| <b>Reference Point Tc</b>     | 90 °C           |
| <b>Working Temperature</b>    | -20 to 50 °C    |
| <b>Storage Temperature</b>    | -40 to 85 °C    |
| <b>IP Protection Class</b>    | IP 20           |

|                       |        |
|-----------------------|--------|
| <b>Length</b>         | 295 mm |
| <b>Width</b>          | 40 mm  |
| <b>Height</b>         | 32 mm  |
| <b>Product weight</b> | 302 g  |

