




Matching SLIM series pendant lamps are available for the current track system. The die-cast aluminium light body is the same size for all variants [300 × 39 mm]. The pendant lamps for current tracks allow suspended mounting up to max. 180 cm.

The single-luminaire SLIM current track lights therefore are especially well suited to gastronomy and retail projects with variable room layouts. The premium SLIM series is rounded off with a flexible fabric cable.

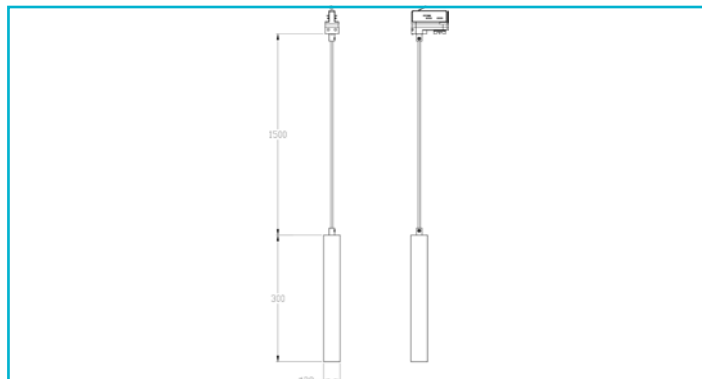

Special features

- Extra-soft fabric cable
- Glare-free due to low UGR value [<19]
- Suspended mounting up to 1,800 mm
- Slim design at just 39 mm in diameter

Housing Material	Aluminium	Working Temperature	-20 to 45 °C
Housing Color	Black	Storage Temperature	-20 to 65 °C
Material of Lens	Glass	IP Protection Class	IP 20
Colour of Lens	Transparent	Load Force max.	0 kN
Surface Structure of Lens	Structured	Loading Weight max.	0 kg
Functions	Phase switch		
Protection Class	Protection class I/protective grounding	Life Time L70 / B50	50000 h
Rated Input	5 W	Switching Cycles	100000
Rated Input Voltage Frequency	200-240 V/AC 50 / 60 Hz	Power Consumption	0 kWh/1000h
Connection Type	Clamp	Energy Efficiency Class Lightsources	This product contains a light source of energy efficiency class E.
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Lightcolor	Warm white (WW)		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	90		
Rated Luminous Flux	500 lm		
Luminous Efficiency	100 lm/W		
Rated Angle of Reflection	24 Degree		
UGR	19		
Light Distribution	Symmetric		
Distribution Characteristic 120°	DLS		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Height	300 mm		
Diameter	39 mm		
Pendulum Length max.	1800 mm		
Product weight	486 g		