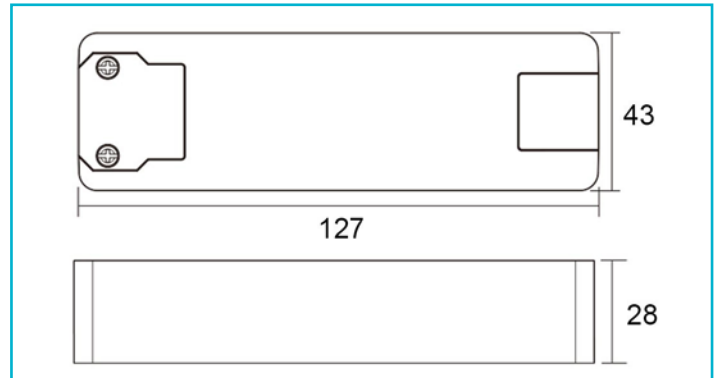


Power supply unit (CC, DC)
BASIC, CC, V8-40-1,050 mA/40 V
**Special features**

- Flicker-free
- Secured against short circuits and overloads
- Overheating protection

Housing Material	Plastic
Housing Color	Black
Functions	Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection

Operating Mode	Constant current
Protection Class	Protection class II/protective insulation
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power	20.0-40 W
Output Voltage	19-38 V/DC
Output Current	1050 mA
Power Factor	0.97

Max. units per MCB B10	8
Max. units per MCB B16	14
Max. units per MCB C10	18
Max. units per MCB C16	29
Inrush Current max.	20 A / 300 μ s
Capacitive Load	355.52 nF
Reference Point Tc	80 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 20

Life Time	30000 h
------------------	---------

Length	127 mm
Width	43 mm
Height	28 mm
Product weight	117 g

