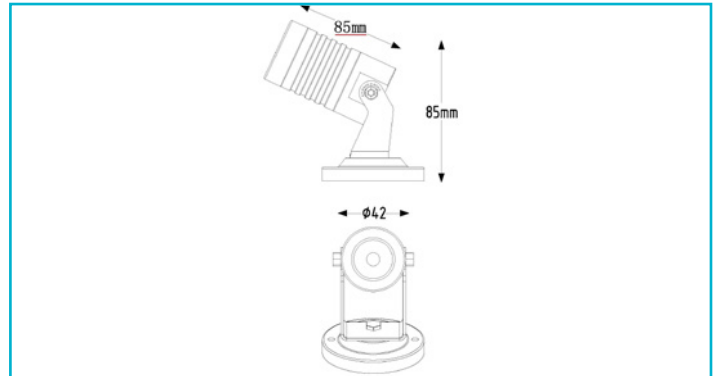


**Special features**

- Including connecting cable

Housing Material	Aluminium
Housing Color	Silver
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Bottom panel mounting, Ceiling installation, Wall installation
Protection Class	Protection class I/ protective grounding
Rated Input	3 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Cable Primary	Yes
Primary Connection	Power plug
Primary Cable Length	2 m
Connection Type According to Standard	Typ Z
Dimmable	No
Motion Detector	No

Width	85 mm
Height	85 mm
Diameter	42 mm

Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class Lamp	IP 65
IP Protection Class Plug	IP 44
Life Time L70 / B50	25000 h
Switching Cycles	100000
Power Consumption	4 kWh/1000h
EEL	G

Light Source	LED, Light source not changeable
Color Temperature	6000 K
Colour Consistency	5 SDCM
Colour consistency light source	5 SDCM
CRI (Ra)	80
Rated Luminous Flux	180 lm
Luminous Efficiency	60 lm/W
Rated Angle of Reflection	30 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Top

