


Strip light
Standard, COB, 24 V-12 W, 3000 K, IP67, 5 m



Housing Color	White	LED Distance	2.08 mm
Mounting Location	Inside, Outside		
Protection Class	Protection class III/safety extra-low voltage	Bending Radius min.	70 mm
Operating Mode	Constant voltage	Total Length to be Operated max.	5 m
Rated Input 1m	12 W	Length	5000 mm
Rated Power Consumption Standby	0.5 W	Width	12 mm
Rated Input Voltage	24 V/DC	Height	4.5 mm
Power Supply Unit incl.	No	Width Hose	12 mm
Connection Cable Primary	Yes	Height Hose	2.2 mm
Primary Connection	With free strand / conductor ends	Length end cap	10 mm
Primary Cable Length	0.5 m	Width end cap	14 mm
Connection Cable Secondary	Yes	Height end cap	3.2 mm
Secondary Connection	Open cables	Product weight	370 g
Secondary Cable Length	0.5 m		
Dimmable	Yes	Working Temperature	-20 to 50 °C
Control	Dimmable via optional controller	Storage Temperature	-30 to 80 °C
Number of Channels	1	IP Protection Class	IP 67
		Type of IP Protection	Silicone hose
Light Source	LED, Light source not changeable	Life Time L70 / B50	36000 h
Lightcolor	Warm white (WW)	Life Time L80 / B10	36000 h
Color Temperature	3000 K		
Colour Consistency	5 SDCM		
Colour consistency light source	5 SDCM		
CRI (Ra)	90		
Rated Angle of Reflection	180 Degree		
Luminous Flux 1m	1220 lm		
Luminous Efficiency 1m	102 lm/W		
LED/Meter	480		
Segment Length	50 mm		
Segment LED Quantity	24		
Switching Cycles	18000		
Power Consumption	12 kWh/1000h		
EEI	F		

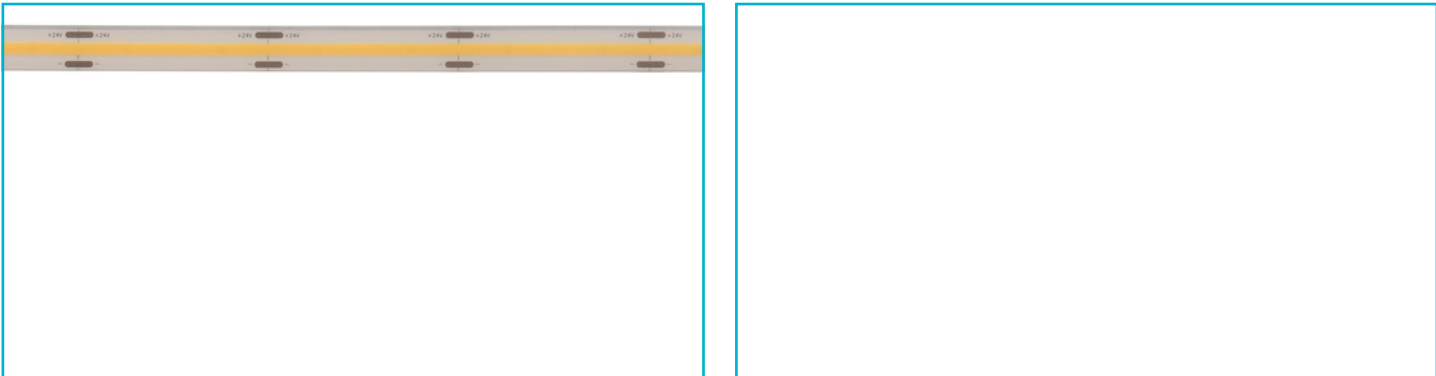

Art.-Nr. 840478

Strip light

Standard, COB, 24 V-12 W, 3000 K, IP67, 5 m

