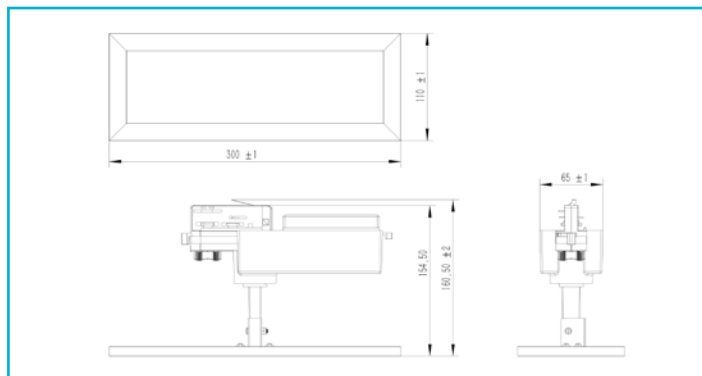


Three-phase light
Panel Track Light, 20 W, 3,000 K, black
**Special features**

- Ideal for homogeneous basic lighting
- Can be rotated and swivelled
- High luminous flux

Housing Material	Aluminium
Housing Color	Black
Material of Lens	Plastic
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Functions	Phase switch
Protection Class	Protection class I/ protective grounding
Rated Input	20 W
Rated Input Voltage Frequency	110-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Lightcolor	Warm white (WW)
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	2000 lm
Luminous Efficiency	100 lm/W
Rated Angle of Reflection	110 Degree
UGR	28
Distribution Characteristic 120°	DLS

Swivel Angle	90 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Length	300 mm
---------------	--------

Width	110 mm
Height	8.5 mm
Product weight	605 g
Working Temperature	-10 to 35 °C
Storage Temperature	-20 to 45 °C
IP Protection Class	IP 20
Max. units per MCB B10	26 PCS
Max. units per MCB B16	43 PCS
Max. units per MCB C10	44 PCS
Max. units per MCB C16	71 PCS
Life Time L70 / B50	50000 h
Switching Cycles	30000
Power Consumption	20 kWh/1000h
EEI	F

