


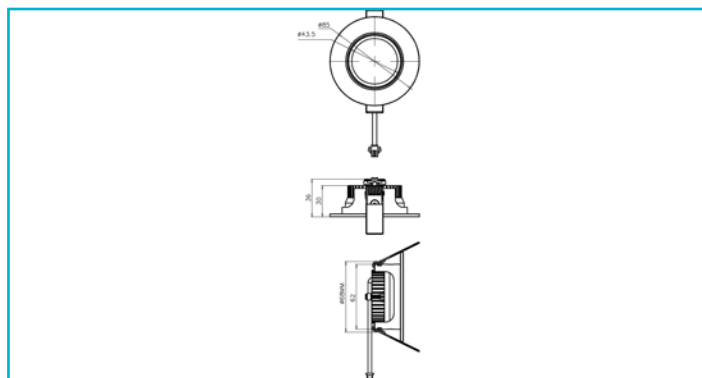

Housing Material	Aluminium	Height	36 mm
Housing Color	Silver	Diameter	85 mm
Housing Surface	Brushed	Installation Depth	34 mm
Material of Lens	Glass	Cut Out Diameter	68 mm
Surface Structure of Lens	Transparent	Product weight	112 g
Protection Class	Protection class III/safety extra-low voltage	Working Temperature	-5 to 40 °C
Operating Mode	Constant voltage	Storage Temperature	-10 to 60 °C
Rated Input	4.5 W	IP Protection Class	IP 20
Rated Power Consumption Standby	0.5 W	Life Time L70 / B50	20000 h
Rated Input Voltage	24 V/DC	Switching Cycles	10000
Power Supply Unit incl.	No	Power Consumption	5 kWh/1000h
Connection Cable Secondary	Yes	EEL	G
Secondary Connection	Open cables		
Secondary Cable Length	0.3 m		
Dimmable	Yes		
Control	Dimmable via optional power supply unit		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Color Temperature	4000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	90		
Rated Luminous Flux	370 lm		
Luminous Efficiency	82.2 lm/W		
Rated Angle of Reflection	45 Degree		
Light Distribution	Symmetric		
Distribution Characteristic 120°	DLS		
Swivel Angle	30 Degree		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		