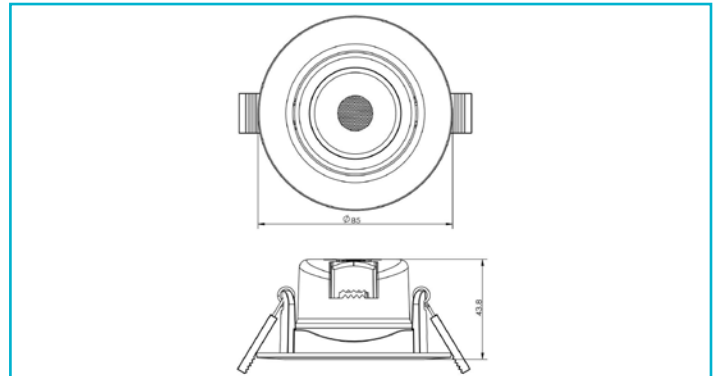


Recessed Spotlight
SMD-68-230V-DIM-2700K-round-black

<STEPTABLE O="PR15_565385" OT="Product" TT="01_DL_Highlight" VC="3912_en"
 VO="576594503" W="Main" />


Special features

- Integrated power supply unit
- Swivel-mounted
- Low installation depth

Housing Material	Plastic
Housing Color	Black
Material of Lens	Plastic
Mounting Type	Installation mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class II/ protective insulation
Rated Input	6.5 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No
Light Source	LED, Light source not changeable
Color Temperature	2700 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	510 lm
Luminous Efficiency	78.5 lm/W
Rated Angle of Reflection	45 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS
Swivel Angle	26 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Height	43.8 mm
Diameter	85 mm
Installation Depth	41.3 mm
Cut Out Diameter	68 mm
Product weight	69 g
Working Temperature	-5 to 40 °C
Storage Temperature	-10 to 40 °C
IP Protection Class	IP 20
Max. units per MCB B10	139 PCS
Max. units per MCB B16	223 PCS
Max. units per MCB C10	139 PCS
Max. units per MCB C16	223 PCS
Life Time L70 / B50	30000 h
Switching Cycles	50000
Power Consumption	7 kWh/1000h
EEI	G

