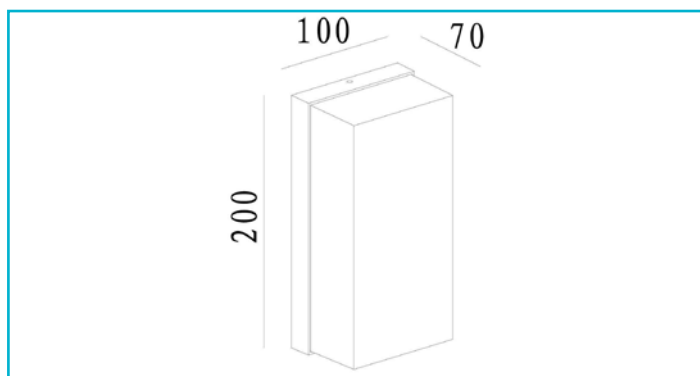


Surface-mounted wall light**Set, Grumium Square CCT II, 10 W, 3,000/4,000 K, grey**

Modular, compact, impactful - the GRUMIUM wall-mounted light can be installed on patios, building walls or in entrances to living spaces and, due to its optional covers in different designs, provides a flexible universal solution for many areas of application. The permanently installed and energy-saving LEDs delivering max. 10 watts are encompassed by a diffuser made of milky plastic and produce a pleasant warm-white light with a luminous flux of 730 lm. The Grumium outdoor light with die-cast aluminium housing comes in an angular and rounded design and has degree of protection IP54.

Special features

- light colour adjustable in 2 stages

Housing Material	Aluminium
Housing Color	Dark grey
Material of Lens	Plastic
Colour of Lens	White
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
Ultraviolet resistance	Yes
Protection Class	Protection class I/ protective grounding
Rated Input	10 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000/4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	205 lm
Luminous Efficiency	20.5 lm/W
Rated Angle of Reflection	138 Degree
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	3
Light characteristics	Direct
Light direction	Top, Below, Side

Length	100 mm
Width	70 mm
Height	200 mm

Base length	95 mm
Base L x W x H	95 x 15 x 195 mm
Base width	15 mm
Base height	195 mm
Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 54
Max. units per MCB B10	61 PCS
Max. units per MCB B16	97 PCS
Max. units per MCB C10	76 PCS
Max. units per MCB C16	121 PCS
Life Time L70 / B50	30000 h
Switching Cycles	15000
Power Consumption	10 kWh/1000h
EEI	F

