
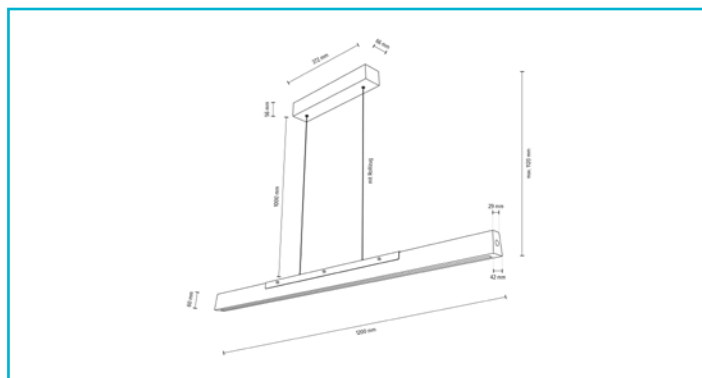


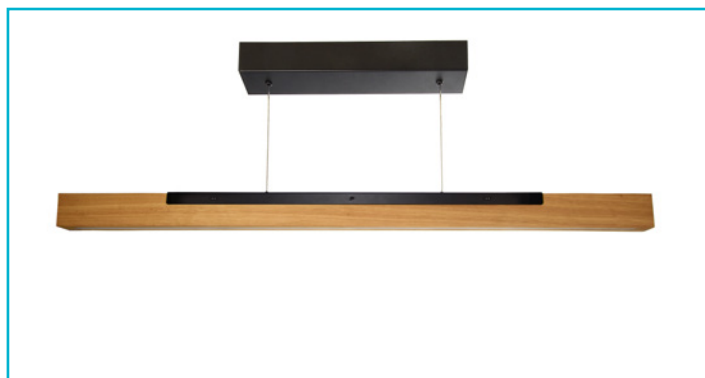

The MADERA pendant lamp combines modern design with environmentally friendly manufacturing. Every light is manufactured from high-quality European oak with FSC certification and therefore comes from sustainable forestry. You can dim the brightness of the light however you like using the touch sensor on the side, creating a pleasant atmosphere. They are also available in a variant with indirect upward lighting and a pull cord for height adjustment so you can adjust the light perfectly at any time. The MADERA pendant lamps have environmentally friendly packaging to protect our environment.

Special features

- Manufactured in Europe from oiled, high-quality class A oak
- FSC-certified oak raw material from sustainable forestry sources
- Infinitely dimmable using touch sensor
- Pull cord for height adjustment during use
- Incl. indirect upward lighting [342235 and 342236 only]

Housing Material	Wood, Steel
Housing Color	Brown, Black
Surface Structure of Lens	Opal
Protection Class	Protection class II/protective insulation
Rated Input	22 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Type	Clamp
Dimmable	Yes
Control	Touch-Sensor
Motion Detector	No

Light Source	LED, Light source changeable TC
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour Rendering Index (Ra)	85
Rated Luminous Flux	2890 lm
Light Distribution	Symmetric
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	3
Light characteristics	Direct, Indirect
Light direction	Top, Below

Length	1200 mm
Width	42 mm
Height	60 mm
Base length	372 mm
Base width	66 mm
Base height	56 mm
Pendulum Length max.	1000 mm

Working Temperature	-25 to 45 °C
Storage Temperature	-25 to 60 °C
IP Protection Class	IP 20

Life Time L90 / B10	54000 h
Switching Cycles	50000
Power Consumption	22 kWh/1000h
Energy Efficiency Class Lightsources	This product contains a light source of energy efficiency class D.