


Surface-mounted wall light
Arcturus I, 6 W, 3,000 K, dark grey

IP54

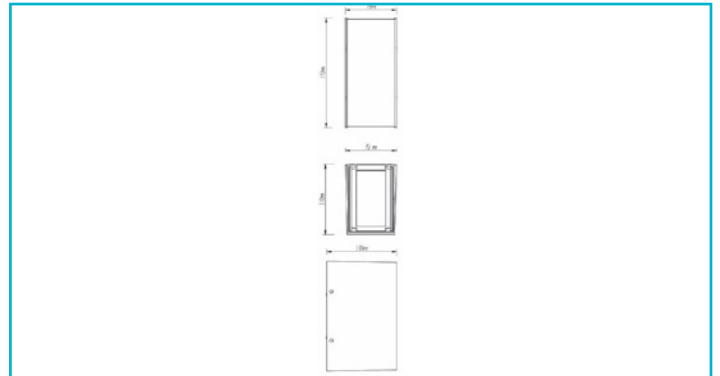

The ARCTURUS LED wall-mounted light has a modern cube design [optionally also elongated] and is suitable for flexible lighting outdoors. Using an integrated shutter, the beam angle of the IP54 light can be adjusted between 0° and 90° in order to generate a different light pattern depending on the requirements of the application. Protected in the dark grey die-cast aluminium housing are the two high-power LEDs, which generate 5.5 W of warm white light.

Special features

- Continuously adjustable light emission angle 0-90°
- Uplight and downlight separately adjustable
- Ideal for customised lighting accents

Housing Material	Aluminium
Housing Color	Dark grey
Material of Lens	Glass
Mounting Type	Top mounting
Mounting Location	Outside
Mounting Area	Wall installation
Ultraviolet resistance	Yes
Protection Class	Protection class I/ protective grounding
Rated Input	6 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	200 lm
Luminous Efficiency	33.3 lm/W
Rated Angle of Reflection	90 Degree
Distribution Characteristic 120°	NDLS

Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below

Length	110 mm
Width	79 mm
Height	172 mm
Base length	68 mm

Base L x W x H	68 x 110 x 110 mm
Base width	110 mm
Base height	110 mm
Working Temperature	-5 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 54
Max. units per MCB B10	122 PCS
Max. units per MCB B16	200 PCS
Max. units per MCB C10	200 PCS
Max. units per MCB C16	337 PCS

Life Time L70 / B50	30000 h
Switching Cycles	100000
Power Consumption	6 kWh/1000h
EEI	G

