


Surface-mounted wall light
Linear II double 250 mm, 14 W, 3,000 K, dark grey



Housing Material	Aluminium	Base L x W x H	242 x 53 x 15 mm
Housing Color	Dark grey	Base width	53 mm
Material of Lens	Glass	Base height	15 mm
Mounting Type	Top mounting	Working Temperature	-20 to 40 °C
Mounting Location	Outside	Storage Temperature	-10 to 60 °C
Mounting Area	Wall installation	IP Protection Class	IP 65
UV resistance	Yes	IK Protection Class	IK05
Protection Class	Protection class II/ protective grounding	Max. units per MCB B10	31 PCS
Rated Input	14 W	Max. units per MCB B16	50 PCS
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz	Max. units per MCB C10	50 PCS
Power Supply Unit incl.	Yes	Max. units per MCB C16	80 PCS
Dimmable	No	Life Time L70 / B50	30000 h
Motion Detector	No	Switching Cycles	15000
Light Source	LED, Light source not changeable	Power Consumption	14 kWh/1000h
Color Temperature	3000 K	EEI	G
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
CRI (Ra)	80		
Rated Luminous Flux	1155 lm		
Luminous Efficiency	82.5 lm/W		
Rated Angle of Reflection	100 Degree		
Distribution Characteristic 120°	DLS		
Light Exit Surfaces	2		
Light characteristics	Direct, Indirect		
Light direction	Top, Below		
Length	250 mm		
Width	60 mm		
Height	60 mm		
Base length	242 mm		

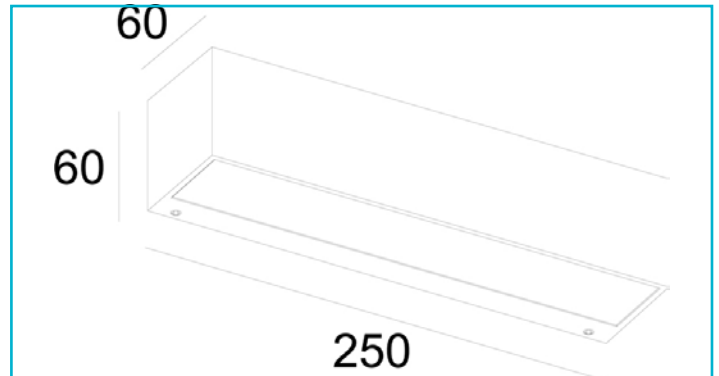