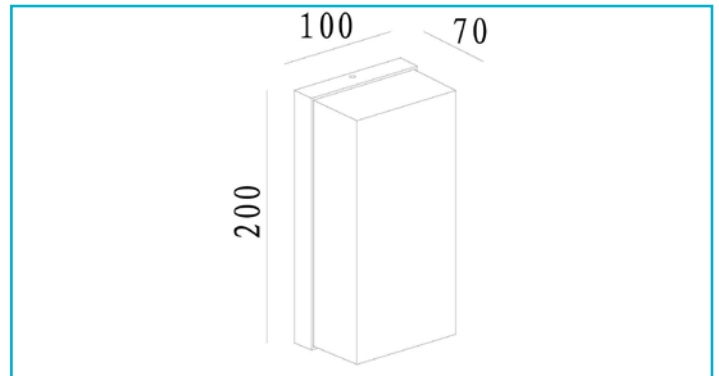


Surface-mounted wall light**Set, Grumium Square CCT III, 10 W, 3,000/4,000 K, grey**

Modular, compact, impactful - the GRUMIUM wall-mounted light can be installed on patios, building walls or in entrances to living spaces and, due to its optional covers in different designs, provides a flexible universal solution for many areas of application. The permanently installed and energy-saving LEDs delivering max. 10 watts are encompassed by a diffuser made of milky plastic and produce a pleasant warm-white light with a luminous flux of 730 lm. The Grumium outdoor light with die-cast aluminium housing comes in an angular and rounded design and has degree of protection IP54.

Special features

- light colour adjustable in 2 stages

Housing Material	Aluminium	Base length	95 mm
Housing Color	Dark grey	Base L x W x H	95 x 15 x 195 mm
Material of Lens	Plastic	Base width	15 mm
Colour of Lens	White	Base height	195 mm
Mounting Type	Top mounting	Working Temperature	-20 to 40 °C
Mounting Location	Outside	Storage Temperature	-10 to 60 °C
Mounting Area	Wall installation	IP Protection Class	IP 54
Ultraviolet resistance	Yes	Life Time L70 / B50	30000 h
Protection Class	Protection class I / protective grounding	Switching Cycles	15000
Rated Input	10 W	Power Consumption	10 kWh/1000h
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz	EEL	F
Power Supply Unit incl.	Yes		
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Color Temperature	3000/4000 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
CRI (Ra)	80		
Rated Luminous Flux	280 lm		
Luminous Efficiency	28 lm/W		
Rated Angle of Reflection	138 Degree		
Distribution Characteristic 120°	NDLS		
Light Exit Surfaces	3		
Light characteristics	Direct		
Light direction	Top, Below, Side		
Length	100 mm		
Width	70 mm		
Height	200 mm		

