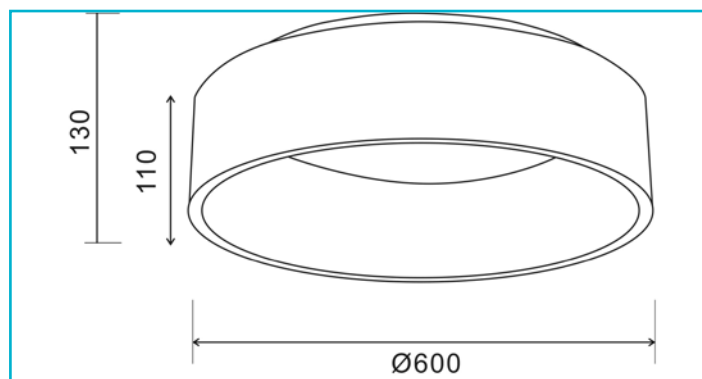


Surface-mounted ceiling light
Sculptoris 600 mm, 42 W, DIM, 3,000/4,000 K, white


Modern elegance for ceilings; the ceiling lights from the SCULPTORIS series can be used in a number of ways indoors thanks to different outputs, sizes and colour temperatures. The surface-mounted ceiling lights provide extensive illumination for rooms and also look great as wall lights.

The light is softly and extensively diffused through the large, circumferential diffuser with matt aluminium design and illuminates rooms pleasantly and evenly.

Special features

- Light colour adjustable in 2 stages
- Uniform illumination
- Circumferential diffuser

Housing Material	Aluminium
Housing Color	White
Surface structure	Matt
Material of Lens	Acryl
Surface Structure of Lens	Satined
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class	Protection class I/ protective grounding
Rated Input	42 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source changeable TC
Color Temperature	3000/4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	3000/3100 lm
Luminous Efficiency	73.8 lm/W
Rated Angle of Reflection	150 Degree

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Height	130 mm
Diameter	600 mm

Working Temperature	-10 to 45 °C
Storage Temperature	-10 to 45 °C
IP Protection Class	IP 20
IK Protection Class	IK04
Max. units per MCB B10	35 PCS
Max. units per MCB B16	56 PCS
Max. units per MCB C10	74 PCS
Max. units per MCB C16	118 PCS

Life Time L70 / B50	30000 h
Switching Cycles	20000
Power Consumption	42 kWh/1000h
Energy Efficiency Class Lightsources	This product contains a light source of energy efficiency class E.

