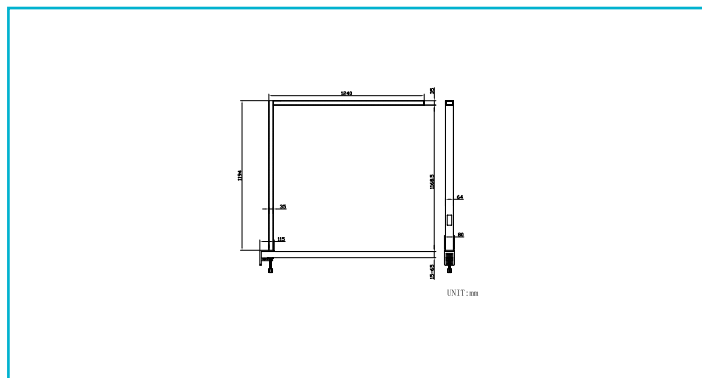



Special features

- Suitable for workstations with screens (in accordance with EN 12464-1 BAP65 [L65 ≤ 3,000 cd/m²])
- Eligible for BEG German federal funding for energy-efficient buildings
- Ideal for high-quality illumination of height-adjustable individual workstations
- Redesigned and extended lamp head for ideal illumination of 160 x 80 cm tables
- Suitable for table designs with 15-65 mm thickness

Housing Material	Aluminium
Housing Color	Black
Material of Lens	Polycarbonate - PC
Suitable for Computer Workstations	Yes
Mounting Location	Inside
Functions	Emergency power capable


Protection Class	Protection class I / protective grounding
Rated Input	80 W
Rated Power Consumption Standby	0.5 W
Rated Power Consumption Network Standby	0.5 W
Rated Input Voltage Frequency	180-264 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Primary Connection	Safety plug
Primary Cable Length	2.5 m
Dimmable	Yes
Control	Touch-Sensor
Motion Detector	Yes
Kind of Motion Detector	Presence detector
Detection Distance	3-3.5 m
Angle of Detection	85 Degree
Motion detector changeable	Yes
Adjustable brightness threshold	No
Adjustable follow-up time	No
Voltage range DC	180-240 V/DC
Voltage range emergency lighting	180-240 V/DC
EOFI	100 %

Light Source	LED, Light source changeable TC
Lightcolor	Warm white/neutral white/ cold white
Colour Temperature	2700-6500 K

Colour Consistency	3 SDCM
Colour consistency light source	3 SDCM
CRI (Ra)	95
Rated Luminous Flux	9000/9800 lm
Luminous Efficiency	122.5 lm/W
Rated Angle of Reflection	120 Degree
Rated Angle of Reflection 2	50 Degree
UGR	6

Light Exit Surfaces	2
Light characteristics	Direct, Indirect
Light direction	Top, Below

Length	1240 mm
Width	64 mm
Height	1194 mm
Base length	115 mm
Base L x W x H	115 x 80 x 120 mm
Base width	80 mm
Base height	120 mm
Product weight	5260 g



Art.-Nr. 346068



Table lamp
Office Three Pro, Motion, 80 W, DIM, 2,700-6,500 K, black

Working Temperature	-20 to 45 °C
Storage Temperature	-40 to 80 °C
IP Protection Class	IP 20
IK Protection Class	IK06
Inrush Current max.	17.6 A / 280 µs
Max. units per MCB B10	13
Max. units per MCB B16	21
Max. units per MCB C10	20
Max. units per MCB C16	32
Life Time L80 / B10	50000 h
Life Time L80 / B50	50000 h
Switching Cycles	100000
Power Consumption	80 kWh/1000h
Energy Efficiency Class Lightsource	This product contains light sources of energy efficiency classes D and F.