
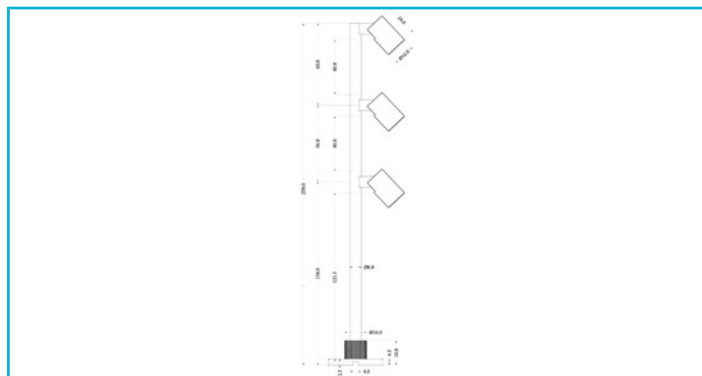


Display case light
Herculis Triple 250 mm, 3 W, 3,000 K, black

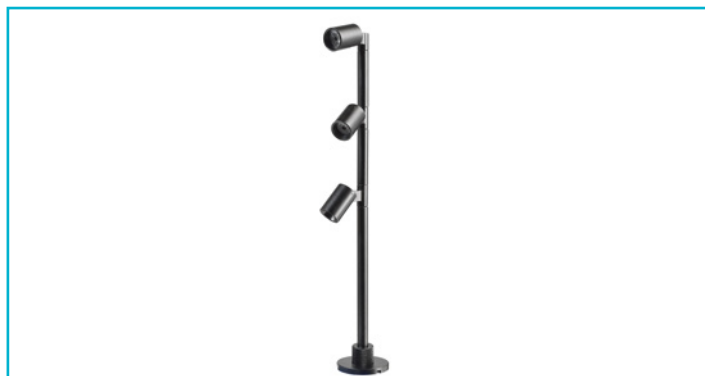

Little helper, big effect. With the HERCULIS display lights in a high-quality aluminium housing, you can reach all corners of a display case. To do so, the lamp head with its 40° light emission angle can be freely rotated and swivelled in any direction. In addition, the intelligent cable routing and the ready-to-use system enable easy surface and recessed mounting in display cases, counters, sales areas or in living rooms.

Special features

- High performance with compact design
- Rotating and swivelling heads
- for recessed and surface mounting thanks to intelligent cable routing
- Ready-to-plug-in system

Housing Material	Aluminium
Housing Color	Black
Mounting Type	Top mounting
Mounting Location	Inside
Protection Class	Protection class III/safety extra-low voltage
Operating Mode	Constant current
Rated Input	3 W
Rated Input Voltage	9 V/DC
Rated Current	350 mA
Power Supply Unit incl.	No
Connection Cable Secondary	Yes
Secondary Cable Length	1 m
Dimmable	No
Motion Detector	No

Diameter	39.2 mm
Base height	4.5 mm
Base H x Ø	4.5 x 39.2 mm
Base diameter	39.2 mm
Working Temperature	-10 to 45 °C
Storage Temperature	-10 to 45 °C
IP Protection Class	IP 20
Life Time L70 / B50	30000 h
Switching Cycles	50000
Power Consumption EEI	3 kWh/1000h G

Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	90
Rated Luminous Flux	263 lm
Luminous Efficiency	87.7 lm/W
Rated Angle of Reflection	30 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Swivel Angle	350 Degree
Light Exit Surfaces	3
Light characteristics	Direct
Light direction	Below

Height	250 mm
---------------	--------

