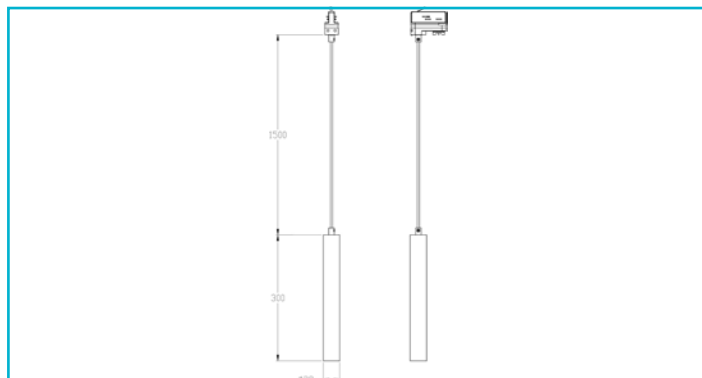


Three-phase pendant lamp
Slim, 5 W, 3,000 K, white


Matching SLIM series pendant lamps are available for the current track system. The die-cast aluminium light body is the same size for all variants [300 × 39 mm]. The pendant lamps for current tracks allow suspended mounting up to max. 180 cm.

The single-luminaire SLIM current track lights therefore are especially well suited to gastronomy and retail projects with variable room layouts. The premium SLIM series is rounded off with a flexible fabric cable.

Special features

- Extra-soft fabric cable
- Glare-free due to low UGR value [<19]
- Suspended mounting up to 1,800 mm
- Slim design at just 39 mm in diameter

Housing Material	Aluminium	Height	300 mm
Housing Color	White	Diameter	39 mm
Material of Lens	Glass	Pendulum Length max.	1800 mm
Colour of Lens	Transparent	Product weight	486 g
Surface Structure of Lens	Structured	Working Temperature	-20 to 45 °C
Halogen free	No	Storage Temperature	-20 to 65 °C
Mounting Type	Top mounting	IP Protection Class	IP 20
Mounting Location	Inside	Load Force max.	0 kN
Mounting Area	Ceiling installation	Loading Weight max.	0 kg
Functions	Phase switch	Life Time L70 / B50	50000 h
Protection Class	Protection class I/ protective grounding	Switching Cycles	100000
Rated Input	5 W	Power Consumption	5 kWh/1000h
Rated Input Voltage Frequency	200-240 V/AC 50 / 60 Hz	Energy Efficiency Class Lightsources	This product contains a light source of energy efficiency class E.
Dimmable	No		
Motion Detector	No		
Light Source	LED, Light source changeable TC		
Lightcolor	Warm white (WW)		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
CRI (Ra)	90		
Rated Luminous Flux	500 lm		
Luminous Efficiency	100 lm/W		
Rated Angle of Reflection	24 Degree		
UGR	19		
Light Distribution	Symmetric		
Distribution Characteristic 120°	DLS		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		

