


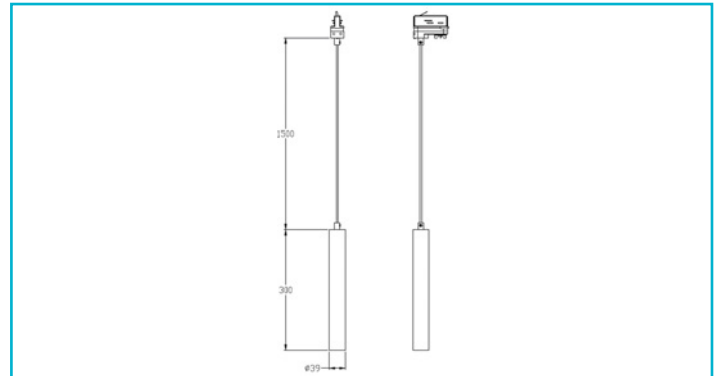


Matching SLIM series pendant lamps are available for the current track system. The die-cast aluminium light body is the same size for all variants [300 × 39 mm]. The pendant lamps for current tracks allow suspended mounting up to 1,800 mm.

The single-luminaire SLIM current track light is therefore ideal for gastronomy and retail projects with changing room layouts. The premium SLIM series is rounded off with a flexible fabric cable.

Special features

- Extra-soft fabric cable
- Glare-free, due to low UGR value [<19]
- Slim design at just 39 mm in diameter
- Max. suspended mounting: 1,800 mm

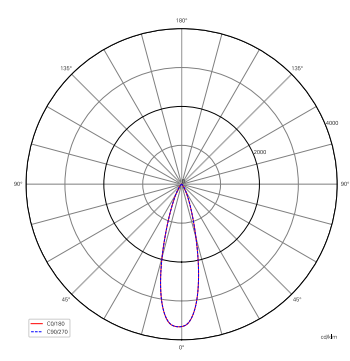Housing Material	Aluminium	Light direction	Below
Housing Color	Black	Height	300 mm
Colour of Lens	Transparent	Diameter	39 mm
Surface Structure of Lens	Structured	Product weight	435 g
Halogen free	No	Working Temperature	-20 to 45 °C
Mounting Type	Top mounting	Storage Temperature	-20 to 65 °C
Mounting Location	Inside	IP Protection Class	IP 20
Mounting Area	Ceiling installation	Max. units per MCB B10	230 PCS
Protection Class	Protection class I/ protective grounding	Max. units per MCB B16	368 PCS
Rated Input	5 W	Max. units per MCB C10	230 PCS
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz	Max. units per MCB C16	368 PCS
Power Supply Unit incl.	Yes	Life Time L70 / B50	50000 h
Dimmable	Yes	Switching Cycles	100000
Control	Leading-edge dimmer, Trailing-edge dimmer	Power Consumption	5 kWh/1000h
Motion Detector	No	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.
Light Source	LED, Light source changeable TC		
Lightcolor	Warm white (WW)		
Color Temperature	2700 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
CRI (Ra)	90		
Rated Luminous Flux	500 lm		
Luminous Efficiency	100 lm/W		
Rated Angle of Reflection	24 Degree		
UGR	19		
Light Distribution	Symmetric		
Distribution Characteristic 120°	DLS		
Light Exit Surfaces	1		
Light characteristics	Direct		