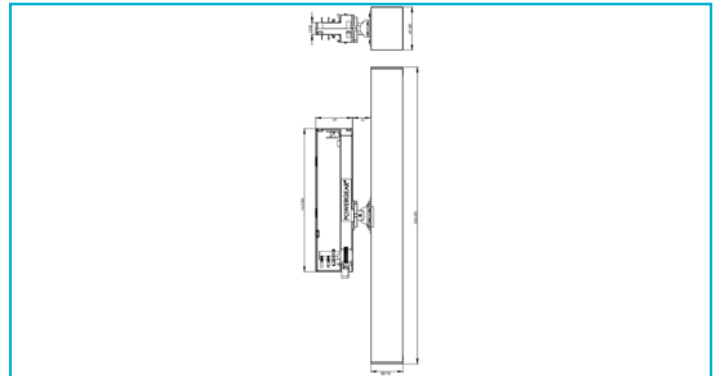


**Special features**

- Power adjustable in four stages
- rotatable and swivelling
- low glare value

Housing Material	Aluminium
Housing Color	Light grey
Material of Lens	Polycarbonate - PC
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Functions	Phase switch
Protection Class	Protection class II/ protective insulation
Power Selectable	23 W, 28 W, 30 W, 32 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Rated Current Selectable	800 mA, 750 mA, 700 mA, 600 mA
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

Light Source	LED, Light source changeable TC
Lightcolor	Neutral white
Color Temperature	4000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Luminous Flux	3050 lm
Luminous Efficiency	90.2 lm/W
Rated Angle of Reflection	36 Degree
UGR	16
Light Distribution	Symmetric

Swivel Angle	25 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Length	336 mm
Width	49 mm
Height	98 mm
Product weight	582 g
Working Temperature	-25 to 45 °C
Storage Temperature	-25 to 50 °C
Surface Temperature max.	45 °C
IP Protection Class	IP 20
Inrush Current max.	20 A / 200 µs
Max. units per MCB B10	15
Max. units per MCB B16	25
Max. units per MCB C10	19
Max. units per MCB C16	30

Life Time L70 / B50	30000 h
Life Time L80 / B10	50000 h
Switching Cycles	15000
Power Consumption	32 kWh/1000h
Energy Efficiency Class Lightsource	This product contains a of energy lass E.

