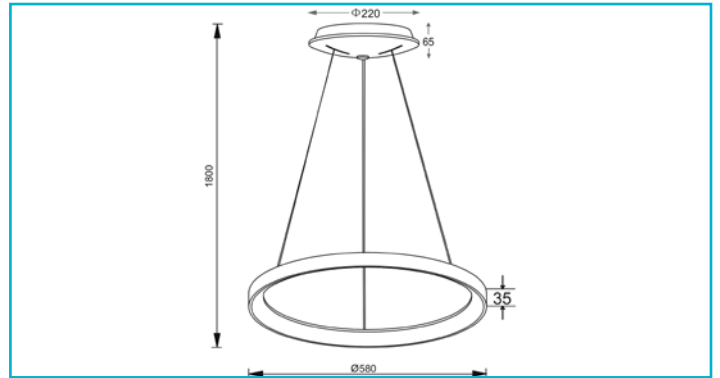


Pendant lamp
Merope 600, 42 W, DIM, 3,000/4,000 K, black


The pendant lamps of the MEROPE series combine timeless elegance and subdued modernity. Available in the diameters 380, 580 and 780 mm, the light colour [3,000/4,000 K] can be selected before installation using a CCT switch. The exterior finish is brushed aluminium in the colours coffee and silver or matt powder-coated in black and white.

Special features

- Light colour adjustable in two stages
- Can be suspended by up to 1,800/3,000 mm [depending on model]

Housing Material	Aluminium	Base height	65 mm
Housing Color	Black	Base H x Ø	65 x 220 mm
Surface structure	Matt	Base diameter	220 mm
Material of Lens	Acryl	Pendulum Length max.	1800 mm
Surface Structure of Lens	Satined	Working Temperature	-10 to 45 °C
Mounting Type	Top mounting	Storage Temperature	-10 to 45 °C
Mounting Location	Inside	IP Protection Class	IP 20
Mounting Area	Ceiling installation	IK Protection Class	IK04
Protection Class	Protection class I/ protective grounding	Max. units per MCB B10	35 PCS
Rated Input	42 W	Max. units per MCB B16	56 PCS
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz	Max. units per MCB C10	74 PCS
Power Supply Unit incl.	Yes	Max. units per MCB C16	118 PCS
Dimmable	Yes	Life Time L70 / B50	30000 h
Control	Leading-edge dimmer, Trailing-edge dimmer	Switching Cycles	20000
Motion Detector	No	Power Consumption	42 kWh/1000h
Light Source	LED, Light source changeable TC	Energy Efficiency Class Lightsource	This product contains a light source of energy efficiency class E.
Color Temperature	3000/4000 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
CRI (Ra)	80		
Rated Luminous Flux	3100/3200 lm		
Luminous Efficiency	76.2 lm/W		
Light Distribution	Symmetric		
Light Exit Surfaces	1		
Light characteristics	Direct, Indirect		
Light direction	Top, Below		
Height	35 mm		
Diameter	580 mm		

