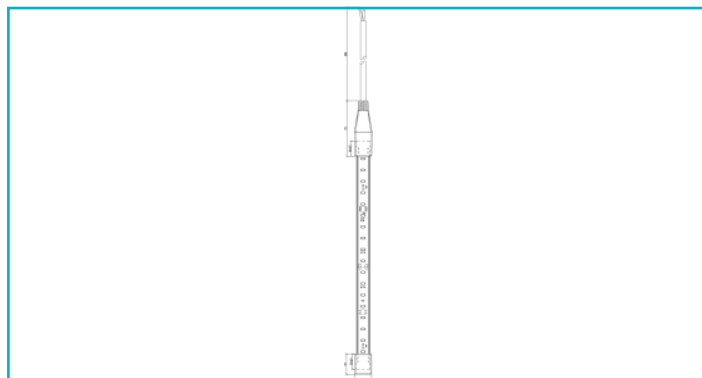
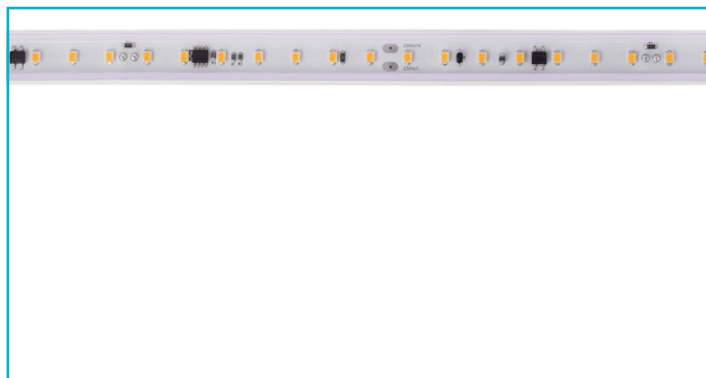


Strip light**Long Run, SMD, 230 V-14 W, 3,000 K, 50 m, silicone**

 IP65


The 230 V LED strip lights are ideal where there is a desire or need to create flexible strips with longer sections of illumination and with water-resistant properties both indoors and outdoors. The lights come ready to connect with fitted IP44 shaped plug and encapsulated end cap. Up to 50 m of lighting can be operated per section where covering longer distances, such as on buildings or in hotel corridors.

Special features

- 230 V direct connection
- Ready to connect using IP44 shaped plug and end cap
- Total length to be operated up to 50 m
- Including mounting material

Housing Material	Copper
Housing Color	White
Material of Lens	Silicone
Mounting Location	Inside, Outside
Protection Class	Protection class II/ protective insulation
Rated Input 1m	14 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Cable Primary	Yes
Primary Connection	Power plug IP44
Primary Cable Length	3 m
Connection Type According to Standard	Typ Z
Connection Cable Secondary	No
Dimmable	No
Number of Channels	1

Light Source	LED, Light source not changeable
Lightcolor	Warm white (WW)
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	80
Rated Angle of Reflection	120 Degree
Distribution Characteristic 120°	DLS
Luminous Flux 1m	1470 lm
Luminous Efficiency 1m	105 lm/W
LED/Meter	84
Segment Length	166.7 mm
Segment LED Quantity	14
LED Distance	11.9 mm

Bending Radius min.	150 mm
----------------------------	--------

Total Length to be Operated max.	50 m
Length	50000 mm
Width	17 mm
Height	13.2 mm
Width Hose	17 mm
Height Hose	13.2 mm
Length end cap	27 mm
Width end cap	21.8 mm
Height end cap	18 mm
Product weight	12160 g

Working Temperature	-10 to 60 °C
Storage Temperature	-15 to 50 °C
IP Protection Class Lamp	IP 65
IP Protection Class Plug	IP 44
Type of IP Protection	PVC cover
Max. units per MCB B10	2 PCS
Max. units per MCB B16	3 PCS
Max. units per MCB C10	2 PCS
Max. units per MCB C16	3 PCS

Life Time L70 / B50	30000 h
Switching Cycles	100000
Power Consumption	14 kWh/1000h
EEL	E

