


Surface-mounted wall light
Muscae, 13 W, 3,000 K, grey

IP54



Housing Material	Aluminium	Diameter	200 mm
Housing Color	Dark grey	Base length	145 mm
Material of Lens	Plastic	Base L x W x H	145 x 28 x 60 mm
Mounting Type	Top mounting	Base width	28 mm
Mounting Location	Outside	Base height	60 mm
Mounting Area	Wall installation	Working Temperature	-20 to 40 °C
Ultraviolet resistance	Yes	Storage Temperature	-10 to 60 °C
Protection Class	Protection class I/ protective grounding	IP Protection Class	IP 54
Rated Input	13.1 W	Life Time L70 / B50	30000 h
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz	Switching Cycles	100000
Power Supply Unit incl.	Yes	Power Consumption	14 kWh/1000h
Dimmable	No	EEL	G
Motion Detector	No		
Light Source	LED, Light source not changeable		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour consistency light source	6 SDCM		
CRI (Ra)	80		
Rated Luminous Flux	860 lm		
Luminous Efficiency	65.6 lm/W		
Rated Angle of Reflection	130 Degree		
Rated Angle of Reflection 2	130 Degree		
Distribution Characteristic 120°	NDLS		
Light Exit Surfaces	2		
Light characteristics	Direct, Indirect		
Light direction	Top, Below		
Length	200 mm		
Width	222 mm		
Height	65 mm		

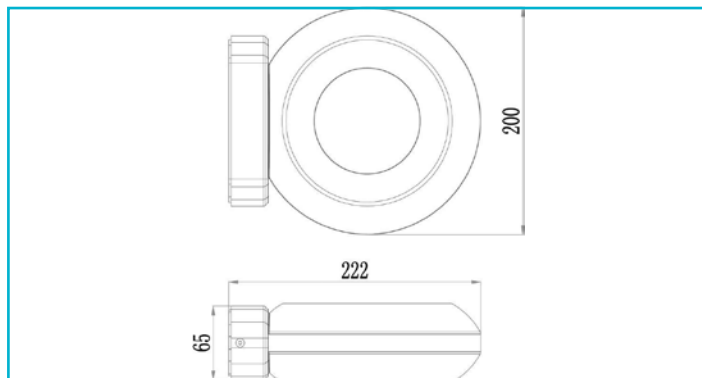