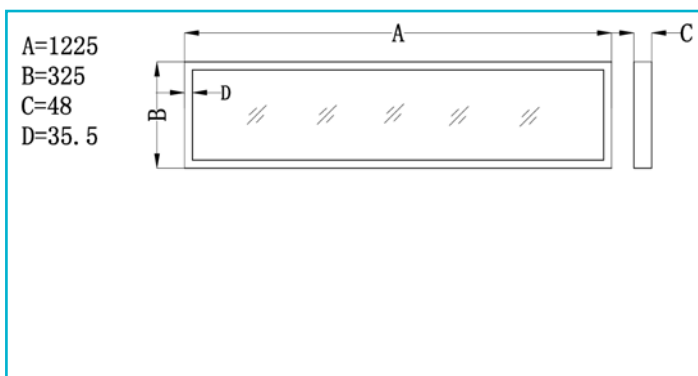


Surface-mounted ceiling light
Pro Office Sano 1225, 35W, DALI, 3000/4000K, white


PRO OFFICE SANO series ceiling lights are an efficient solution for renovating and modernising old T5/T8 louver lights. Due to slightly larger dimensions, the lights cover the old installations and so do not require the ceiling to be repainted.

Arrestor cables, plug connectors and mounting brackets make installation so easy that it can be performed by one person. In addition to ease of installation, the series offers impressive technical highlights: It provides flexible light control via CCT switch (3,000 K/4,000 K), dimmable variants (leading-edge/trailing-edge or DALI) and output adjustment in four stages (TRIAC variants only). They are also eligible for BEG German federal

Special features

- Renovation solution for T5/T8 louver lights
- uniform illumination
- Covers the old installation, therefore no repainting necessary
- Easy to install due to plug connector, arrestor cables and mounting bracket
- Light colour adjustable in three levels
- Output adjustable in four levels [TRIAC variants only]
- Microprismatic surface structure
- Eligible for BEG German federal funding for energy-efficient build-

Housing Material	Aluminium, Stainless steel
Housing Color	White
Product certification	ENEC
Through Wiring possible	Yes
Suitable for Computer Workstations	Yes
Halogen free	Yes
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Functions	Emergency power capable, Corridor function DALI

Rated Luminous Flux	4200/4500/4400 lm
Luminous Efficiency	124 lm/W
Rated Angle of Reflection	90 Degree
UGR	19


Light Exit Surfaces	1 PCS
Light characteristics	Direct
Light direction	Below

Length	1225 mm
Width	325 mm
Height	48 mm

Protection Class	Protection class I / protective grounding
Rated Input	35 W
Rated Power Consumption Standby	0.5 W
Rated Power Consumption Network Standby	0.5 W
Rated Input Voltage Frequency	198-264 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Min./max. dimming range	1-100 %
Control	DALI 2 / DT6, Intelli Push-Dim
Motion Detector	No
Voltage range DC	176-280 V/DC
Voltage range emergency lighting	176-280 V/DC
EOFI	100 %

Working Temperature	-10 to 40 °C
Storage Temperature	-10 to 40 °C
IP Protection Class	IP 40
IK Protection Class	IK03
Inrush Current max.	30 A / 200 µs
Max. units per MCB B10	8
Max. units per MCB B16	13
Max. units per MCB C10	18

Light Source	LED, Light source not changeable
Color Temperature	3000/3500/4000 K
Colour Consistency	3 SDCM
Colour consistency light source	3 SDCM
CRI (Ra)	90



Art.-Nr. 348262



Surface-mounted ceiling light
Pro Office Sano 1225, 35W, DALI, 3000/4000K, white

Max. units per MCB C16	29
Life Time L80 / B20	50000 h
Switching Cycles	100000
EEI	F