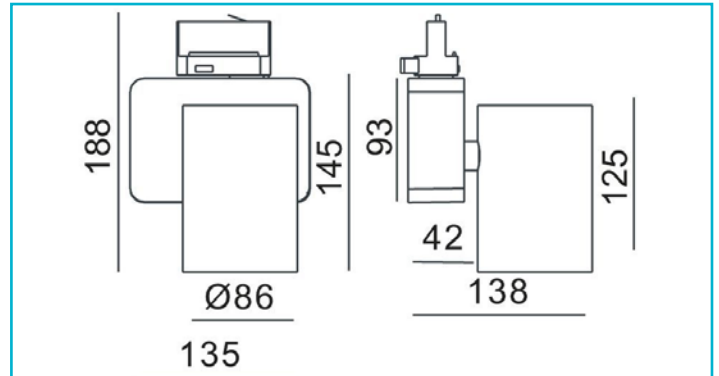


**Special features**

- can be rotated and swivelled
- large tilt angle

Housing Material	Aluminium
Housing Color	Silver
Material of Lens	Plastic
Mounting Type	Top mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Functions	Phase switch

Protection Class	Protection class I/ protective grounding
Rated Input	33 W
Rated Power Consumption Standby	0.5 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	Yes
Control	Leading-edge dimmer, Trailing-edge dimmer
Motion Detector	No

Light Source	LED, Light source not changeable
Lightcolor	Warm white (WW)
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	90
Rated Luminous Flux	2470 lm
Luminous Efficiency	74.8 lm/W
Rated Angle of Reflection	33 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS

Swivel Angle	180 Degree
Light Exit Surfaces	1
Light characteristics	Direct

Light direction	Below
Length	135 mm
Width	138 mm
Height	188 mm
Diameter	86 mm
Product weight	1187 g

Working Temperature	-5 to 40 °C
Storage Temperature	-20 to 50 °C
IP Protection Class	IP 20
Max. units per MCB B10	43 PCS
Max. units per MCB B16	69 PCS
Max. units per MCB C10	43 PCS
Max. units per MCB C16	69 PCS

Life Time L70 / B50	20000 h
Switching Cycles	15000
Power Consumption	33 kWh/1000h
EEI	G

