


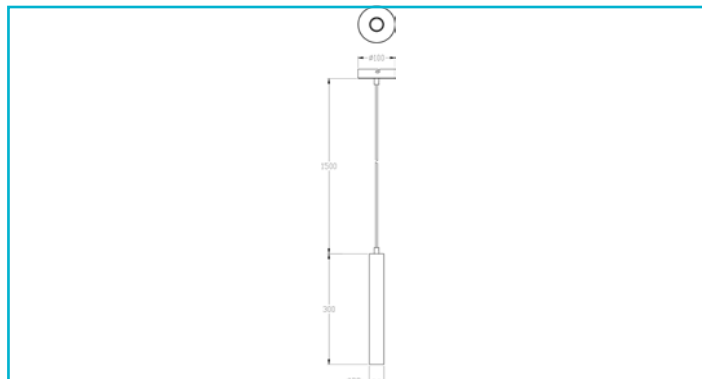

SLIM series lights include single-luminaire and triple-luminaire pendant lamps, recessed ceiling lights and matching pendant lamps for the DEKO-LIGHT current track system. The die-cast aluminium light body is the same size for all variants [300 × 39 mm]. Several SLIM models therefore can also be combined with each other in larger spaces. The pendant lamps for ceiling installation with max. 180 cm suspended mounting are available in a one or three-luminaire variant; three-luminaire variant both with long or round base depending on the arrangement of the lights.

While the fixed SLIM models create a pleasant warm white light in dining rooms, reading nooks and more, the single-luminaire SLIM current

Special features

- Extra-soft fabric cable
- Glare-free, due to low UGR value [<19]
- Slim design at just 39 mm in diameter
- Incl. silver-coloured reflector ring

Housing Material	Aluminium
Housing Color	Black
Material of Lens	PMMA
Colour of Lens	Transparent
Surface Structure of Lens	Structured
Halogen free	No
Protection Class	Protection class I/protective grounding
Rated Input	5 W
Rated Input Voltage Frequency	200-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No
Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	6 SDCM
Colour consistency light source	6 SDCM
CRI (Ra)	90
Rated Luminous Flux	500 lm
Rated Angle of Reflection	24 Degree
UGR	19
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below
Height	300 mm
Diameter	39 mm
Base height	25 mm
Base diameter	100 mm
Pendulum Length max.	1800 mm

Working Temperature	-20 to 45 °C
Storage Temperature	-20 to 65 °C
IP Protection Class	IP 20
Life Time L70 / B50	50000 h
Switching Cycles	100000
Power Consumption	5 kWh/1000h
EEI	E