


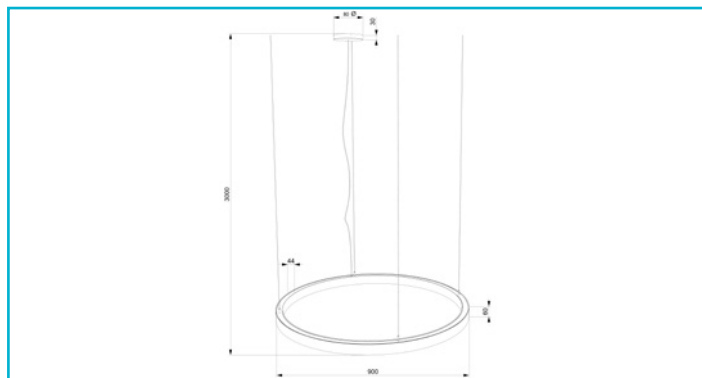

#### Special features


- DALI dimmable with integrated power supply
- continuous wiring possible
- tool-free connection with plug-in terminals
- easy to install / maintain
- long-lasting, easily replaceable components
- invisible screw connections
- customised designs available on request

|                                        |                                             |
|----------------------------------------|---------------------------------------------|
| <b>Housing Material</b>                | Aluminium, Steel                            |
| <b>Housing Color</b>                   | White                                       |
| <b>Material of Lens</b>                | Polycarbonate - PC                          |
| <b>Surface Structure of Lens</b>       | Microprismatic                              |
| <b>Through Wiring possible</b>         | Yes                                         |
| <b>Mounting Type</b>                   | Top mounting                                |
| <b>Mounting Location</b>               | Inside                                      |
| <b>Mounting Area</b>                   | Ceiling installation                        |
| <b>Protection Class</b>                | Protection class I/<br>protective grounding |
| <b>Rated Input</b>                     | 89 W                                        |
| <b>Rated Power Consumption Standby</b> | 0.6 W                                       |
| <b>Rated Input Voltage Frequency</b>   | 198-264 V/AC 50 / 60 Hz                     |
| <b>Power Supply Unit incl.</b>         | Yes                                         |
| <b>Dimmable</b>                        | Yes                                         |
| <b>Control</b>                         | DALI 2 / DT6, Push-Dim                      |
| <b>Motion Detector</b>                 | No                                          |
| <b>Voltage range DC</b>                | 180-280 V/DC                                |

|                                        |                                    |
|----------------------------------------|------------------------------------|
| <b>Light Source</b>                    | LED, Light source<br>changeable TC |
| <b>Color Temperature</b>               | 2700 K                             |
| <b>Colour Consistency</b>              | 3 SDCM                             |
| <b>Colour consistency light source</b> | 2 SDCM                             |
| <b>CRI (Ra)</b>                        | 90                                 |
| <b>Rated Luminous Flux</b>             | 10000 lm                           |
| <b>Luminous Efficiency</b>             | 112 lm/W                           |
| <b>Rated Angle of Reflection</b>       | 90 Degree                          |
| <b>UGR</b>                             | 19                                 |

|                              |                  |
|------------------------------|------------------|
| <b>Light Exit Surfaces</b>   | 2 PCS            |
| <b>Light characteristics</b> | Direct, Indirect |
| <b>Light direction</b>       | Top, Below       |

|                                 |                |
|---------------------------------|----------------|
| <b>Height</b>                   | 60 mm          |
| <b>Diameter</b>                 | 900 mm         |
| <b>Pendulum Length max.</b>     | 3000 mm        |
| <b>Working Temperature</b>      | -20 to 50 °C   |
| <b>Storage Temperature</b>      | -40 to 80 °C   |
| <b>Surface Temperature max.</b> | 80 °C          |
| <b>IP Protection Class</b>      | IP 40          |
| <b>IK Protection Class</b>      | IK05           |
| <b>Inrush Current max.</b>      | 8.5 A / 2.8 µs |
| <b>Max. units per MCB B10</b>   | 12 PCS         |
| <b>Max. units per MCB B16</b>   | 15 PCS         |
| <b>Max. units per MCB C10</b>   | 19 PCS         |
| <b>Max. units per MCB C16</b>   | 31 PCS         |
| <b>Life Time L70 / B50</b>      | 180000 h       |
| <b>Life Time L80 / B10</b>      | 120000 h       |
| <b>Life Time L80 / B50</b>      | 130000 h       |
| <b>Life Time L90 / B10</b>      | 50000 h        |
| <b>Life Time L90 / B20</b>      | 60000 h        |
| <b>Switching Cycles</b>         | 100000 PCS     |

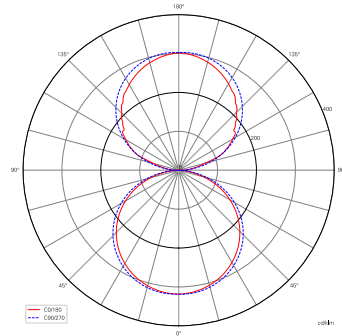

Art.-Nr. 950281



Pendant lamp  
Lautaro 900/60 Up/Down Prism P4, 89 W, DALI, 2700 K, white

---

|                                     |                                                                    |
|-------------------------------------|--------------------------------------------------------------------|
| Power Consumption                   | 89 kWh/1000h                                                       |
| Energy Efficiency Class Lightsource | This product contains a light source of energy efficiency class E. |